

Features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Twin body with 4 optical modules, 31000 lumens, 205W, 156lm/W, 4000K, CRI 80, aisle beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 821x386x133mm, Mains + control cable of 2 meter, SylSmart Connected Industry enabled.


Product Overview

Product name	Sylbay 4000K L4 32000LM AISLE SSE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	31000
Luminaire efficacy (lm/W)	156
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 21
Photobiological Risk Group	RG1
Total power consumption (W)	205
Electrical protection	Class I
Control gear type	LED driver constant current

Sylbay 4000K L4 32000LM AISLE SSE
0040347

Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403472
Warranty	5 years

Photometry

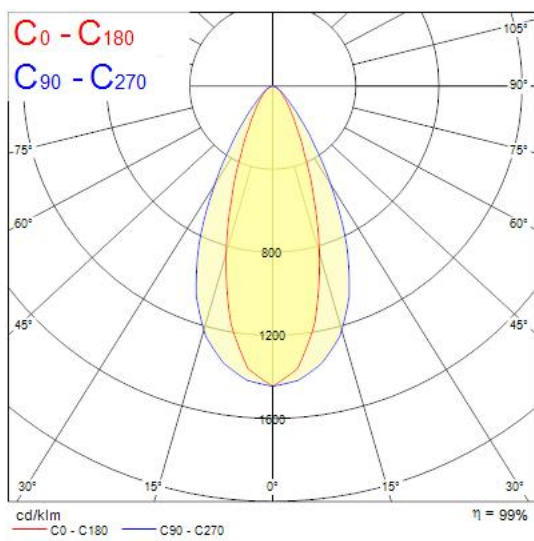

Technical drawings

