



Sounder-Strobe-Combination AXL04

Loud signalling devices with 32 different signals and 5 Joule strobe light

- ▶ Volume: approx. 106 dB(A)
- ▶ 2 stage alarm
- ▶ Flash energy 5 Joule
- ▶ Low current consumption
- ▶ Simple Installation

Application

The AXL04 is very versatile in its application. The Sounder-strobe-light-combination AXL04 is often used in burglar and fire alarm systems, office building, hospitals or airports.


Design

Thanks to its housing, the AXL04 is suitable for use both indoors and outdoors. The device generates 32 different signal tones, which can be set individually by the user. Flash energy 5 Joule.

The optical and acoustical signal can be controlled separately of each other. The design of the housing enables simply installation.


Signalling device

for use in an airport.

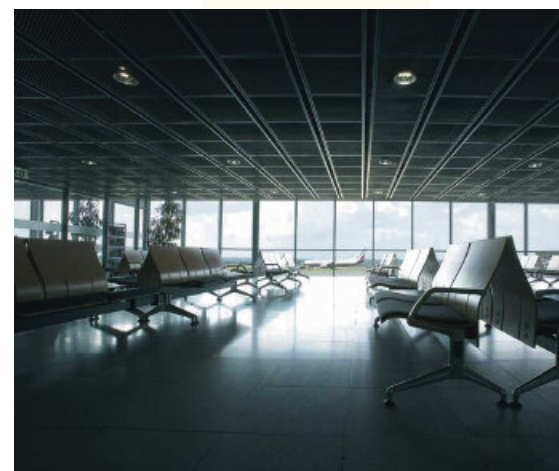

Technical specifications

Housing	Polycarbonate
Colour	red, similar to RAL 2002
Cap	red, amber, other colors on request
Protection degree	IP 65
Flash energy	5 Joule
Volume	approx. 106 dB(A) (Regarding volume specifications, please see the chapter "Technical Informations".)
Signals	32
Temperature range	-25 °C up to +55 °C
Weight	0.6 kg

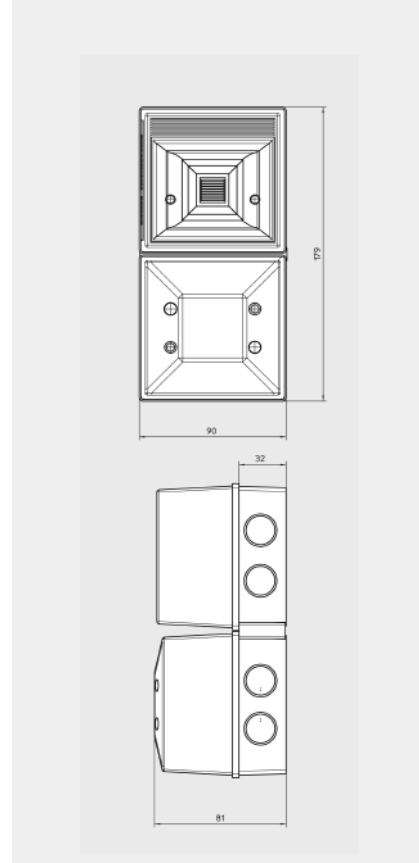

First and Second Sound	Frequency / Hz	Rept. rate	Switch 1 2 3 4 5	Special Application
1 Alternate two-tone	800 - 1000	0,5	11111	Fire Alarms
2 Alternate two-tone	2500 - 3100	0,5	01111	Security Alarms
3 Alternate fast two-tone	800 - 1000	0,25	10111	Increased urgency
4 Alternate fast two-tone	2500 - 3100	0,25	00111	Security deterrent
5 Alternate two-tone	440 - 554	0,4/0,1	11011	AFNOR, France
6 Alternate two-tone	430 - 470	1,0	01011	
7 Alternate v. fast two-tone	800 - 1000	0,13	10011	
8 Alternate v. fast two-tone	2500 - 3200	0,07	00011	
9 Alternate two-tone	440 - 554	2,0	11101	Turn-out, Sweden
10 Continuous tone	700	-	01101	All-clear, Sweden
11 Continuous tone	1000	-	10101	
12 Continuous tone	1000	-	00101	
13 Continuous tone	2300	-	11001	
14 Continuous tone	440	-	01001	
15 Interrupted tone	1000	2,0	10001	
16 Interrupted tone	420	1,25	00001	AS2220, Australia
17 Interrupted tone	1000	0,5	11110	
18 Interrupted tone	2500	0,25	01110	
19 Interrupted tone	2500	0,5	10110	
20 Interrupted tone	700	6/12	00110	Pre-vital mess, Sweden
21 Interrupted tone	1000	1,0	11010	
22 Interrupted tone	700	4,0	01010	Air-raid, Sweden
23 Interrupted tone	700	0,25	10010	Local warning, Sweden
24 Interrupted tone	720	0,7/0,3	00010	Industrial alarm, Germany
25 Int. fast rising volume	1400	0,25	11100	
26 Fast siren	250 - 1200	0,085	01100	
27 Rising constant, fall	1000	10/40/10	10100	Industrial alarm, Germany
28 ISO 8201 Evacuation	800 - 1000	Std.	00100	Int. evacuation alarm
29 Fast whoop	500 - 1000	0,15	11000	
30 Slow whoop	500 - 1200	4,5	01000	Evacuation, The Netherlands
31 Reverse sweep	1200 - 500	1	10000	Evacuation, Germany
32 Siren	500 - 1200	3,0	00000	

Switch settings: ON = 1 and OFF = 0

PFEER Signals acc. UKOOA:

Alarm	Signal 15 Interrupted tone 1000 Hz
PAPA	Signal 31 Reverse Sweep 1200-500 Hz
Toxic gas	Signal 11 Continuous tone 1000 Hz

* The full article number is made up by appending the colour code for the coloured cap to the article numbers given below.

transp.	01
red	02
amber	03
green	04
blue	05

Order information

Type	Name	Rated voltage	Current consumption (A)	Art. no. *
AXL04	Sounder-Strobe-Combination	230 VAC	0.15	225 107 .. 100
AXL04	Sounder-Strobe-Combination	24 VDC	0.25	225 113 .. 100

Subject to change without notice · Printout 03/11