

Features

- Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Twin body with 4 optical modules, 37300 lumens, 268W, 139lm/W, 4000K, CRI 80, wide beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 821x386x133mm, Mains + control cable of 2 meter, SylSmart Connected Industry enabled.


Product Overview

Product name	Sylbay 4000K L4 37000LM WIDE SSE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	37300
Luminaire efficacy (lm/W)	139
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	268
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integral

Sylbay 4000K L4 37000LM WIDE SSE
0040348

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403489
Warranty	5 years

Photometry

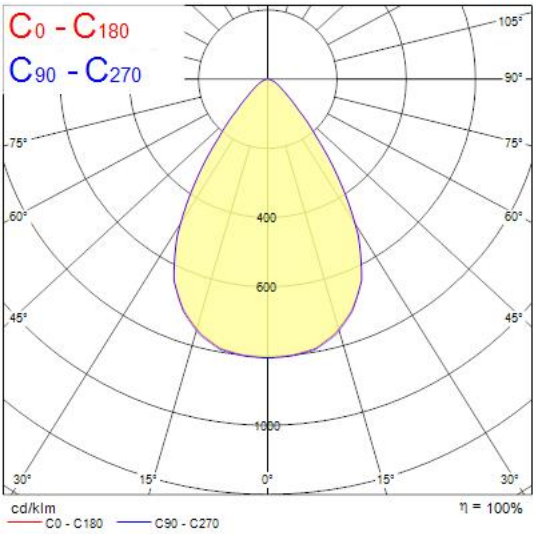

Technical drawings

