




Features

- Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 47500lumens, 276W, 172lm/W, 4000K, CRI80, wide beam optic. Fitted with a high bay PIR for 360° detection up to 16m range at 15m mounting height. 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06 (sensor IK03).

Product Overview

Cap/Base	N/A
Control gear type	LED driver constant current

Photometry

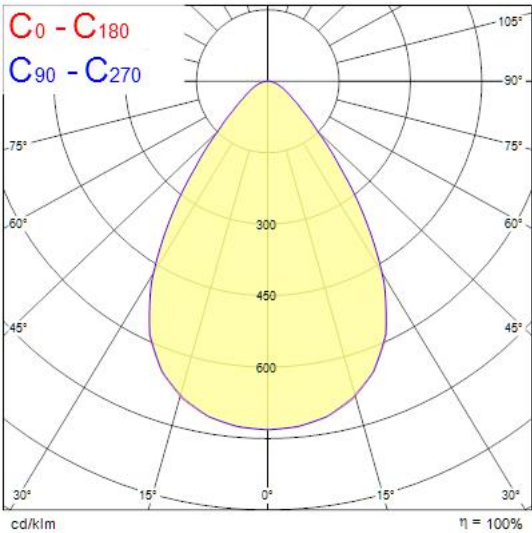

Technical drawings

