


Data Sheet | Item Number: 294-5053

Lighting connector; push-button, external; without ground contact; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5053>



Color: white

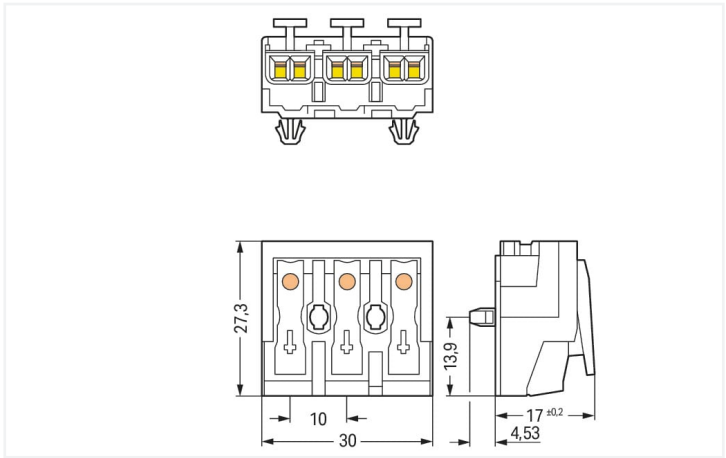

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data		
Connection points	15	Connection 1 Connection type 1 External 1 Connection technology Push-in CAGE CLAMP® Number of connection points 2 Actuation type Push-button Connectable conductor materials Copper Solid conductor 0.5 ... 2.5 mm² / 18 ... 12 AWG Solid conductor; push-in termination 0.5 ... 2.5 mm² / 18 ... 12 AWG Stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor; with insulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with uninsulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with ferrule; push-in termination 0.5 mm² / 18 AWG Strip length 8 ... 9 mm / 0.31 ... 0.35 inches Pole number 3 Wiring direction Side-entry wiring
Total number of potentials	3	
Number of connection types	4	
PE function	without PE contact	



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	1- -N
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	9.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821098294
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	dbbaa654-4d9a-48ca-b04c-05a813323884
SCIP notification number (Belgium)	ecd8983b-985e-41c7-b4dc-1c255796e262
SCIP notification number (Bulgaria)	896a38c7-af88-4504-9d41-bed9706ffa6f
SCIP notification number (Czech Republic)	b18fd3b7-5d25-4b53-9bcb-3691b9c5c130
SCIP notification number (Denmark)	dcc9c702-7993-4193-a848-cf6bee614455
SCIP notification number (Finland)	bd472f0d-1d35-4f1d-a395-88df4783b91c
SCIP notification number (France)	4e5c06c7-6505-4154-997e-99f2e3997399
SCIP notification number (Germany)	78433021-80fe-476b-abeb-a42c7715633c
SCIP notification number (Hungary)	1eacf8a6-b163-447f-baab-48a4f3c5d83f
SCIP notification number (Italy)	d4315aeb-1460-4ed9-af87-2a5e0a7ffc3
SCIP notification number (Netherlands)	84e8aa06-dcc2-4229-8d14-7a5a565481ce
SCIP notification number (Poland)	68ca9dab-f581-4126-9613-684e7ed84893
SCIP notification number (Romania)	e1aee21c-038a-4ade-882f-6bafef87f6bd
SCIP notification number (Sweden)	22bbbd79-0e3a-4e22-a332-cc81f573d3fc



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-5053



Documentation

Additional Information
Technical Section
pdf 2240.62 KB



Bid Text
294-5053
19.02.2019
xml 5.58 KB
294-5053
13.06.2017
doc 27.00 KB



CAD/CAE-Data

CAD data
2D/3D Models 294-5053



CAE data
WSCAD Universe 294-5053
ZUKEN Portal 294-5053



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white

[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool




1.1.2.2 Operating tool



Item No.: 206-294
Disconnection tool; green

Installation Notes

Installation




3-pole – without ground contact

Snap-in foot


Drilled hole for snap-in mounting foot

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

