

## Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4050 - 7100lm (selected by DIP switches); 26.5 - 46W; 153 - 157lm/W; 4000K; SDCM<3; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.


## Product Overview

<b>Product name</b>	RESISTO 1500 HE IP66 4050-7100LM 840
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Suspended, Wall surface mounted
<b>General application</b>	Logistics & Industry
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4357167
<b>Fixture luminous flux (lm)</b>	7100
<b>Luminaire efficacy (lm/W)</b>	154
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	110
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG1

## RESISTO 1500 HE IP66 4050-7100LM 840 0010331

Total power consumption (W)	46
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103310
Warranty	5 years
Dimming method	N/A

### Photometry

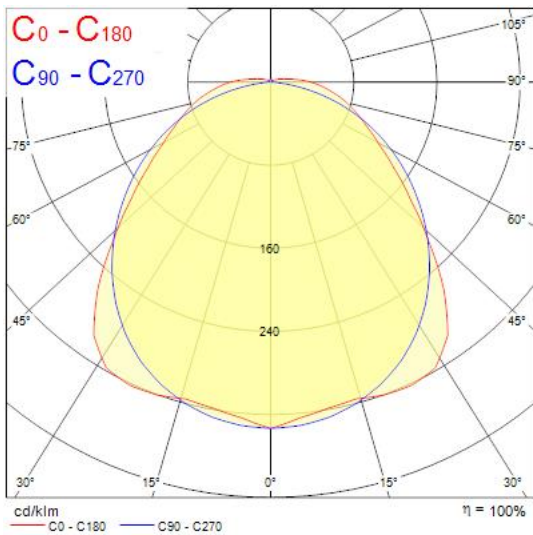

### Technical drawings

