

Features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Twin body with 4 optical modules, 37300 lumens, 268W, 139lm/W, 4000K, CRI 80, aisle beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 821x386x133mm, Mains + control cable of 2 meter, SylSmart Connected Industry enabled.


Product Overview

Product name	Sylbay 4000K L4 37000LM AISLE SSE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	37300
Luminaire efficacy (lm/W)	139
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	268
Electrical protection	Class I
Control gear type	LED driver constant current


Sylbay 4000K L4 37000LM AISLE SSE
0040349

Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403496
Warranty	5 years

Photometry

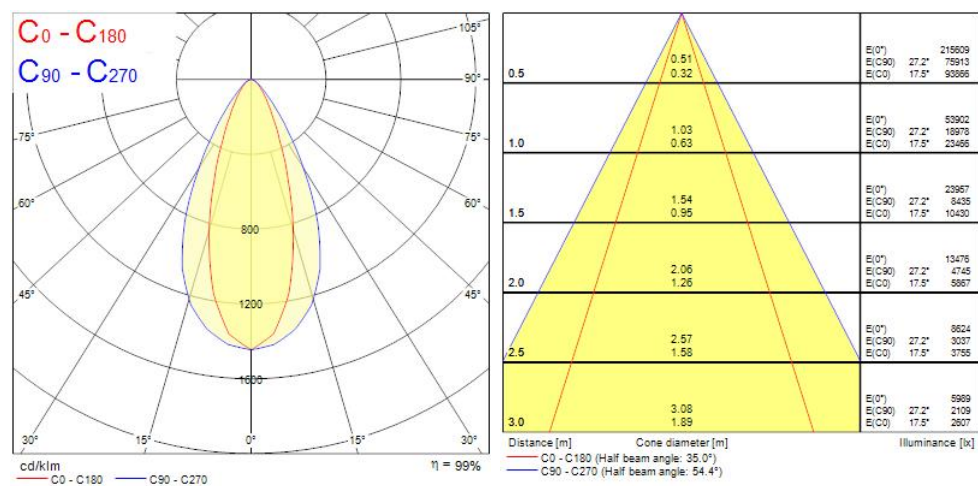

Technical drawings

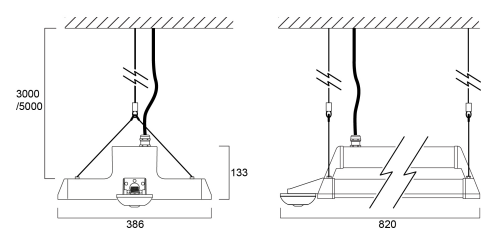

Data table

GENERAL DATA

Sylbay 4000K L4 37000LM AISLE SSE 0040349

Product name	Sylbay 4000K L4 37000LM AISLE SSE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Operating temperature range (°C)	-30°C...+40°C
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	37300
Luminaire efficacy (lm/W)	139
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 22
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	268
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.98
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integral
Drive current (mA)	900
Inrush Current (A)	65



Sylbay 4000K L4 37000LM AISLE SSE
0040349

Inrush Duration (µs)	268
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	5
Max. products per 20A B Breaker	6

LIFETIME DATA

Lifespan L70 B50	120000
Lifespan L70 B20	120000
Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L80 B20	120000
Lifespan L80 B10	100000
Lifespan L90 B50	71500
Lifespan L90 B20	58000
Lifespan L90 B10	52000

PHYSICAL DATA

Housing colour	Grey
IP rating	IP65
IK rating	IK08
IK rating of sensor	IK03
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	821
Nominal Product Width (mm)	386
Weight (kg)	8.24

PACKAGING

Single packaging type	Carton
Product EAN number	5410288403496
Packaging single width (cm)	47.5
Packaging single depth (cm)	27.0



Sylbay 4000K L4 37000LM AISLE SSE
0040349

DUN14 (outer)	05410288403496
Packaging outer length / height (cm)	92.0

SAFETY DATA

Optimal operating condition (°C)	-30-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No