

## Features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 1425 - 2500lm (selected by DIP switches); 11 - 19W; 129 - 132lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 650mm x 89mm x 88mm; D-mark.


## Product Overview

Product name	RESISTO 600 IP66 1425-2500LM 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357162
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	132
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1


## RESISTO 600 IP66 1425-2500LM 840 0010326

Total power consumption (W)	19.0
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288103266
Warranty	5 years
Dimming method	N/A


### Photometry

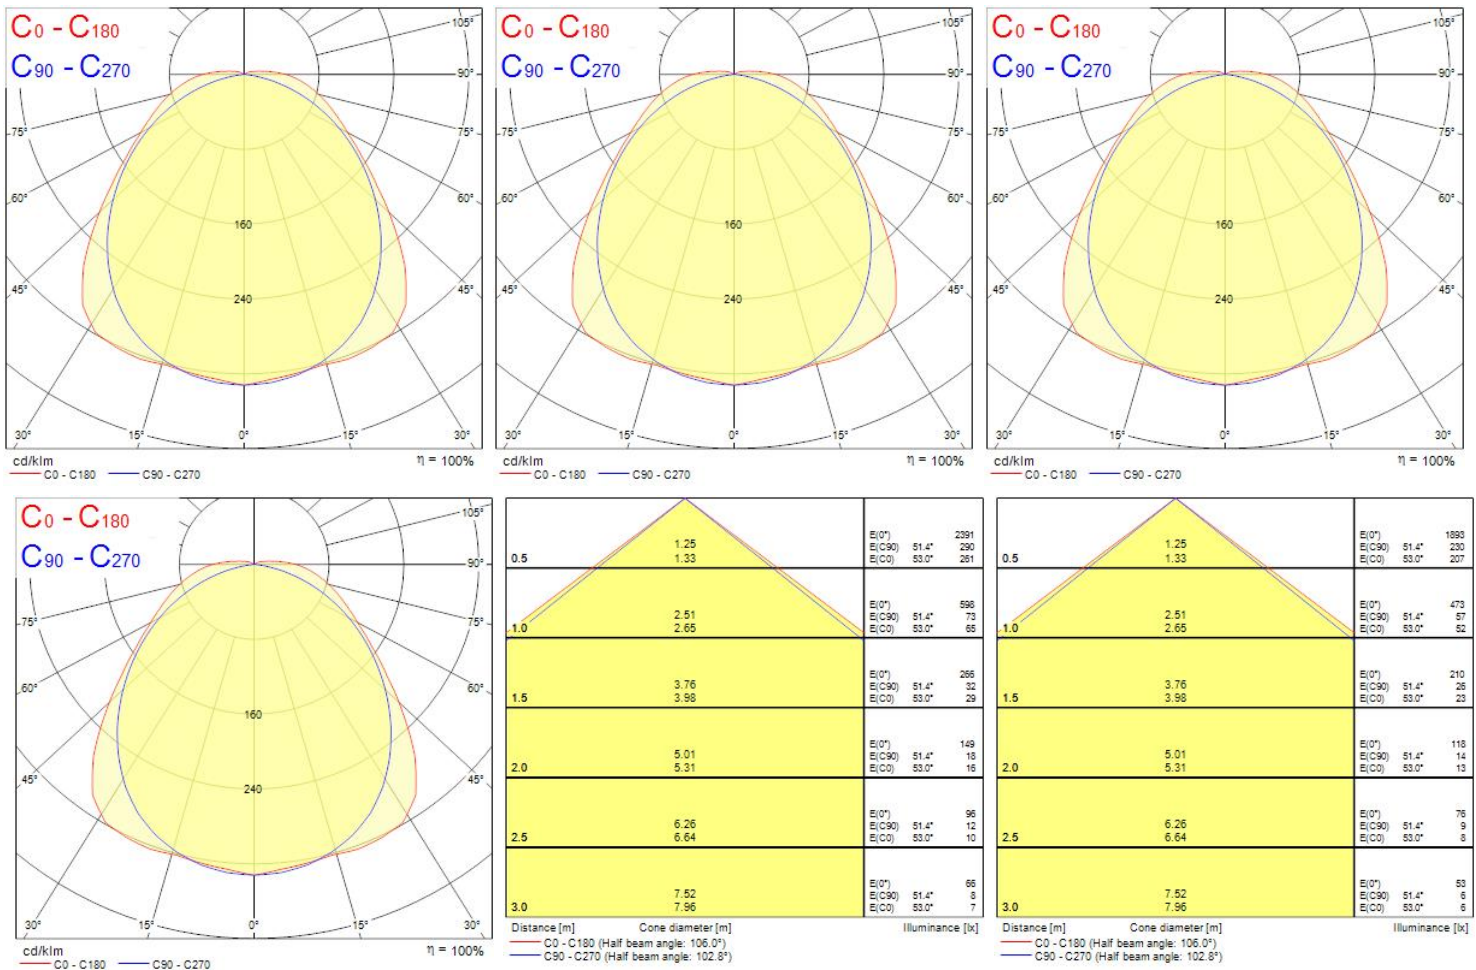

## RESISTO 600 IP66 1425-2500LM 840 0010326

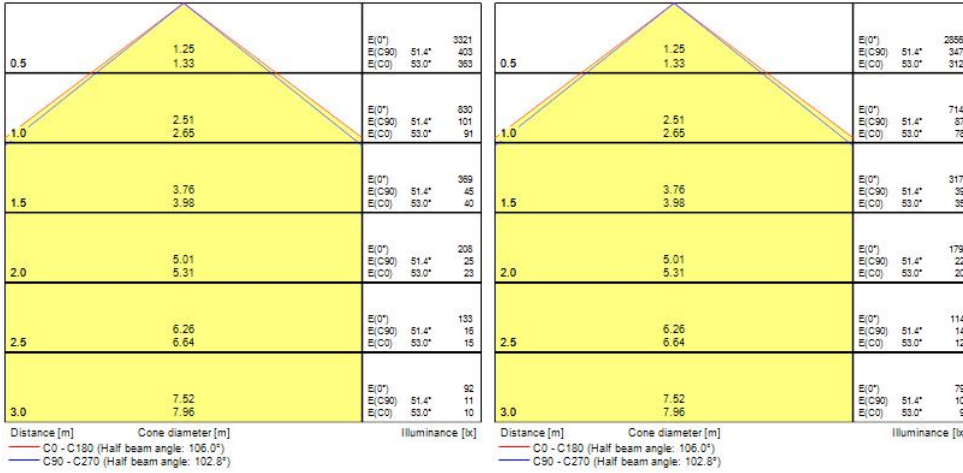

## Technical drawings

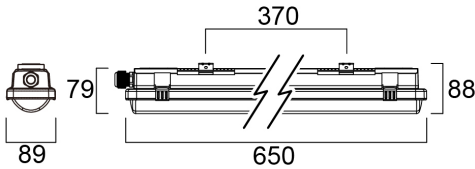

## Data table

### GENERAL DATA

Product name	RESISTO 600 IP66 1425-2500LM 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate

## RESISTO 600 IP66 1425-2500LM 840 0010326

<b>Mount</b>	Ceiling surface mounting, Suspended, Wall surface mounted
<b>General application</b>	Logistics & Industry
<b>Operating temperature range (°C)</b>	-20°C...+40°C
<b>Performance ambient temperature Tq (°C)</b>	25
<b>ETIM Class</b>	EC002892
<b>E-number FI</b>	4357162
<b>Warranty</b>	5 years

### OPTICAL DATA

<b>Fixture luminous flux (lm)</b>	2500
<b>Luminaire efficacy (lm/W)</b>	132
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	5
<b>Colour Consistency (SDCM)</b>	5
<b>Beam Angle (°)</b>	110
<b>Distribution type</b>	Diffuse
<b>Glare control</b>	< 24
<b>Photobiological Risk Group</b>	RG1

### ELECTRICAL DATA

<b>Total power consumption (W)</b>	19.0
<b>Primary Supply/Product voltage - min (V)</b>	220.0
<b>Primary Supply/Product voltage - max (V)</b>	240.0
<b>Lamp power factor</b>	1
<b>THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %</b>	20
<b>Electrical protection</b>	Class I
<b>Control gear required</b>	No
<b>Control gear type</b>	LED driver constant current

## RESISTO 600 IP66 1425-2500LM 840 0010326

No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	6.1
Inrush Duration (µs)	18
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	60
Max. products per 13A C Breaker	79
Max. products per 16A C Breaker	97
Max. products per 20A C Breaker	121
Max. products per 10A B Breaker	60
Max. products per 13A B Breaker	79
Max. products per 16A B Breaker	97
Max. products per 20A B Breaker	121
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

### PHYSICAL DATA

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	650

## RESISTO 600 IP66 1425-2500LM 840 0010326

Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	0.85

### PACKAGING

Product EAN number	5410288103266
Packaging single length / height (cm)	65.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288103266
Units per outer package	1
Packaging outer length / height (cm)	65.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

### SAFETY DATA

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No