

Sylvania Granit IP65 0-10V 32000lm 840 WB

Item No: 0039740




PRO




Technical Assets

Dimensions (mm)

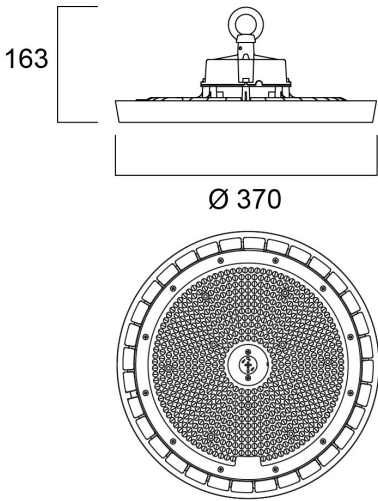

Photometrics

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]	E(C180) [lx]	Beam angle [°]	Half beam angle [°]	Illuminance [lx]
0.5	0.87	36085	410°	18783				
1.0	1.74	21641	410°	4891				
1.5	2.61	9618	410°	2088				
2.0	3.48	5410	410°	1173				
2.5	4.35	3483	410°	751				
3.0	5.22	2405	410°	521				



Sylvania Granit IP65 0-10V 32000lm 840 WB

Item No: 0039740

SYLVANIA

General data

Product name	Sylvania Granit IP65 0-10V 32000lm 840 WB
Technology	LED
Cap/Base	N/A
General application	Logistics & Industry
Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
E-number FI	4357130
Warranty	5 years

Optical data

Fixture luminous flux (lm)	32000
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	200
Primary Supply/Product voltage - min (V)	220.0
Lamp power factor	0.95
Electrical protection	Class I
Dimming method	0-10V
Drive current (mA)	780
Inrush Current (A)	100
Inrush Duration (µs)	300
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	4
Max. products per 13A C Breaker	5
Max. products per 16A C Breaker	7
Max. products per 20A C Breaker	9
Max. products per 20A B Breaker	5
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	92000
Lifespan L90 B50	51000

Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	163
Nominal Product Diameter (mm)	370
Weight (kg)	2.865

Sylvania Granit IP65 0-10V 32000lm 840 WB

Item No: 0039740



Packaging

Product EAN number	5410288397405
Packaging single width (cm)	40.0
Packaging single depth (cm)	14.5
DUN14 (inner)	05410288397405
Packaging outer length / height (cm)	40.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-30-50