


Our team has been notified of the issue and we are working to fix it as soon as possible.

Please try again a little bit later.

PRODUCTINFORMATIEBLAD

PTi 70/220...240 S

POWERTRONIC® INTELLIGENT PTi S | E-VSA voor HID lampen, voor inbouw in armaturen

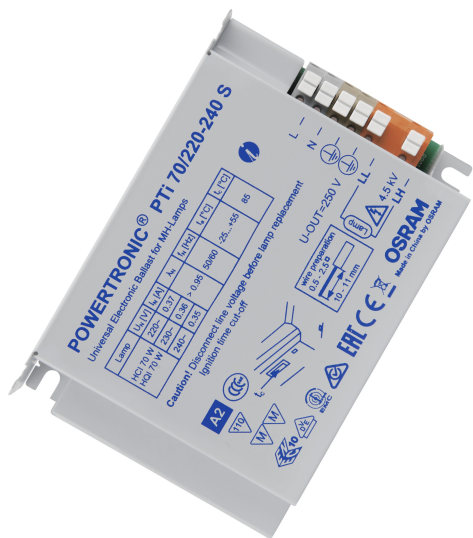

Toepassingsgebieden

- Shop lighting
- Health and fitness areas (in luminaires with protection class IP66 or higher)
- Effect and accent lighting

Productvoordelen

- Long reliable life at maximum permitted temperatures
- Compact dimensions and low weight for small luminaire designs
- Excellent thermal behavior for very high limit temperatures t_c and t_a
- Automatic safety shutdown of lamps in the event of a defect or at end of life (EoL)

Productkenmerken

- Energy Efficiency Index EEI: A2
- Supply voltage: 220...240 V
- Line frequency: 50...60 Hz
- RI suppression: to EN 55015/CISPR 15
- Safety: to EN 61347-2-12

The server returned a "500 Internal Server Error".

Something is broken. Please let us know what you were doing when this error occurred. We will fix it as soon as possible. Sorry for any inconvenience caused.

— immunity according to EN 61347

Our team has been notified of the issue and we are working to fix it as soon as possible.

Please try again a little bit later.

TECHNISCHE GEGEVENS

ELEKTRISCHE GEGEVENS


Nominale vermogen	79,00 W
Nominale spanning	220...240 V
Nominale uitgangsspanning	250 V
Ingangsspanning AC	198...264 V
U-OUT (werkspanning)	250 V
Type stroom	Wisselspanning
Inschakelstroom	45 A ¹⁾
Netfrequentie	50/60 Hz
Arbeidsfactor λ	0,95 ²⁾
E-VSA efficiëntie	92 %
Maximum aantal E-VSA's op een z 10 A (B)	7 ³⁾
Maximum aantal E-VSA's op een z 16 A (B)	13 ³⁾
Werk frequentie	0.200...0.240 kHz

1) t_{breedte} = 250 µs (gemeten bij 50 % I_{piek})

2) Minimum

3) Type B

AFMETINGEN & GEWICHT



Lengte	110,00 mm
Montage gat afstand, lengte	99,0 mm
Breedte	75,00 mm
Breedte (incl. ronde armaturen)	75.00 mm
Hoogte	30,00 mm
Hoogte (incl. cylin. armaturen)	30.00 mm

Our team has been notified of the issue and we are working to fix it as soon as possible.

Please try again a little bit later.

Draaddiameter aan ingang	0,5...2,5 mm ²
Draaddiameter aan uitgang	0,5...2,5 mm ²
Striplengte primair	10...11 mm
Booglengte	10...11 mm
Product gewicht	255,00 g

KLEUREN & MATERIALEN

Behuizingsmateriaal	Metaal
Body materiaal	Metaal

TEMPERATUREN & BEDRIJFSOMSTANDIGHEDEN

Omgevingstemperatuur bereik	-25...+55 °C
Maximumtemperatuur op Tc-testpunt	85 °C
Max. behuizing temperatuur bij defect	110 °C
Toegestane relatieve luchtvochtigheid	5...85 % ¹⁾

¹⁾ Maximaal 56 dagen/jaar op 85%

Levensduur

Levensduur E-VSA	50000 h ¹⁾
------------------	-----------------------

¹⁾ Bij maximale Tc / 10% uitvalpercentage

MOGELIJKHEDEN

Dimbaar	Nee
Oververhittingsbeveiliging	Vermogenreductie en uitschakeling bij T 85 °C op het tc punt
Maximale kabellengte E-VSA/lamp REM	1,5 m
Geschikt armaturen met veiligheidsklasse	I
Geschikt voor noodverlichting	Nee

CERTIFICATEN & NORMEN

Keurmerken	ENEC 10 / VDE / VDE-EMC / EAC / C-Tick
Normen	Volgens EN 61347-2-12 / Volgens EN 55015 / Volgens EN 61000-3-2 / Volgens EN 61547
Veiligheidsklasse	I
Type bescherming	IP20
Energie-efficiëntieklasse	A2
EEL – Energie label	A2

LOGISTIEKE GEGEVENS

Opslagtemperatuur	-40...+85 °C
-------------------	--------------

Veiligheidsadvies

Ballast losses and lamp heat radiation can lead to heat accumulation in a completely closed case. Therefore it is necessary to ensure that the temperature at the measuring point t of the ECG does not exceed the maximum value.

Attention!

For safety reasons disconnect the device before replacing the lamp!

Any conductive material must have a minimum distance of 4 mm to the front of the terminal block.

Installation by qualified electrician only.

Terminals for protective earth not suitable for any through connection.

AANVULLENDE PRODUCTINFORMATIE

- In order to achieve good radio interference suppression:
 1. Keep the cable between ECG and lamp as short as possible.
 2. The single lamp wires must be routed as close as possible to each other.

DOWNLOADS

Documenten en certificaten		Naam document
	Gebruiksaanwijzing / veiligheidsinstructies	590729_EAC - PTI S / PT-FIT S
	Conformiteitsverklaringen	339884_Tender Document for POWERTRONIC EVG.eng
	Conformiteitsverklaringen	EU Declaration of Conformity 3363432
	Conformiteitsverklaringen	VD EMC Certificate 40025469
	Certificaten	554891_EAC PT family
CAD/BIM-bestanden		Naam document
	CAD-gegevens 3D PDF	313407_110x75x30 9900004

LOGISTIEKE GEGEVENS

Productcode	Verpakkingseenheid (stuks per verpakking)	Afmetingen (lengte x breedte x hoogte)	Brutogewicht	Volume
-------------	---	--	--------------	--------

Productcode	Verpakkingseenheid (stuks per verpakking)	Afmetingen (lengte x breedte x hoogte)	Brutogewicht	Volume
4008321049629	Onverpakt 1	111 mm x 32 mm x 76 mm	255.00 g	0.27 dm ³
4008321049636	Verzenddoos 20	412 mm x 136 mm x 194 mm	5169.89 g	10.87 dm ³

De genoemde productcodes beschrijven de kleinste hoeveelheid die besteld kan worden. Eén verzendeenheid kan bestaan uit één of meer afzonderlijke producten. Bij het plaatsen van een order enkele of veelvouden van de verpakkingseenheid invoeren.

DISCLAIMER

Onder voorbehoud van verandering zonder kennisgeving. Fouten en drukfouten voorbehouden. Zorg ervoor dat u de meest recente versie gebruikt.