


Interrata Adjustable
INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB
0049042



Product features

- Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm2 flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 1025lm, 13.5W, 76lm/W, CRI80, 30° beam angle, 50000 hrs L70 B50 lumen maintenance, 200mm diameter, 229mm recessing tube height, 2.3kg weight.

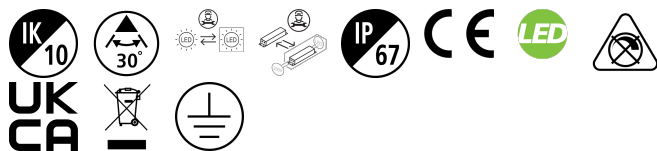


PRODUCT OVERVIEW

Product name	INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000758
E-number FI	4579505
Warranty	5 years
Useful luminous flux (Fuse)	1025
Fixture luminous flux (lm)	1025
Luminaire efficacy (lm/W)	76
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	13.5
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10

Interrata Adjustable
INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB
0049042

Product EAN number 5410288490427

PHOTOMETRY

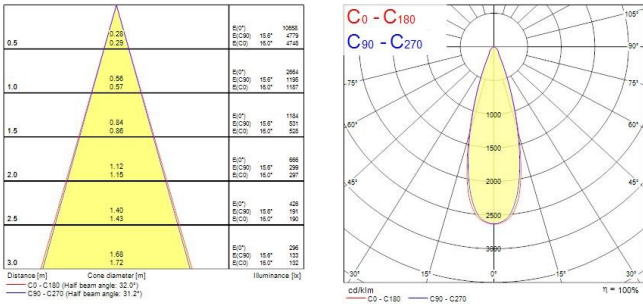

TECHNICAL DRAWINGS

