

INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB
0049042



Features

- Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm² flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 1025lm, 13.5W, 76lm/W, CRI80, 30° beam angle, 50000 hrs L70 B50 lumen maintenance, 200mm diameter, 229mm recessing tube height, 2.3kg weight.


Product Overview

Product name	INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000758
E-number FI	4579505
Fixture luminous flux (lm)	1025
Luminaire efficacy (lm/W)	76
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	30
Photobiological Risk Group	RG1
Total power consumption (W)	13.5
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)

INTERRATA ADJUSTABLE M IP67 CLEAR 1000LM 830 MB 0049042

Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490427
Warranty	5 years
Colour Code	830
Useful luminous flux (#use)	1025

Photometry

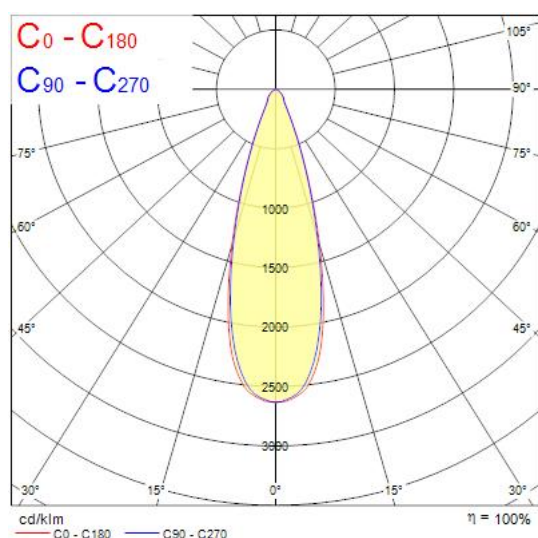

Technical drawings

