

GIOTTO 305 4000K RECESSED MW SENSOR  
3034774



Features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 14.7W, 119lm/W, 4000K, CRI 80, non-dimmable, integral microwave sensor. 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.


Product Overview

|                                 |                                     |
|---------------------------------|-------------------------------------|
| Product name                    | GIOTTO 305 4000K RECESSED MW SENSOR |
| Technology                      | LED                                 |
| Cap/Base                        | N/A                                 |
| Housing                         | PC Polycarbonate                    |
| Mount                           | Ceiling recessed mounting           |
| Environment                     | Indoor                              |
| E-number FI                     | 4225703                             |
| Fixture luminous flux (lm)      | 1750                                |
| Luminaire efficacy (lm/W)       | 119                                 |
| Colour temperature (K)          | 4000                                |
| Light colour                    | Neutral White                       |
| CRI (Ra)                        | 80                                  |
| Colour Variation Initial (SDCM) | 3                                   |
| Glare control                   | < 25                                |
| Photobiological Risk Group      | RG0                                 |
| Total power consumption (W)     | 14.7                                |
| Electrical protection           | Class I                             |
| Control gear type               | LED driver constant current         |
| Control gear mounting           | Integrated                          |

GIOTTO 305 4000K RECESSED MW SENSOR  
3034774

|                     |                        |
|---------------------|------------------------|
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour      | White                  |
| IP rating           | IP44                   |
| IK rating           | IK10                   |
| Product EAN number  | 8711971347743          |
| Warranty            | 5 years                |
| Colour Code         | 840                    |

## Photometry

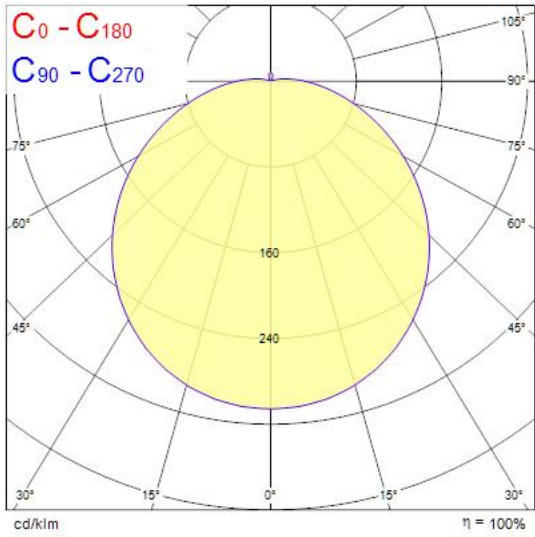

## Technical drawings

