



Data Sheet | Item Number: 294-5215

Lighting connector; push-button, external; with snap-in ground contact; L3-L2-L1-PE-N; 5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5215>

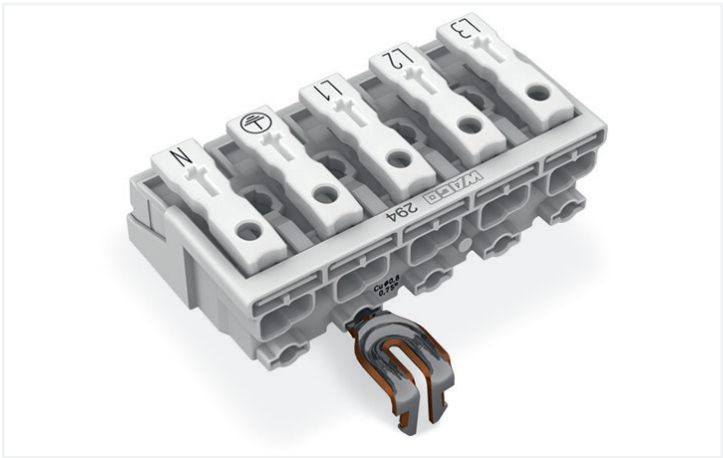

Color: white

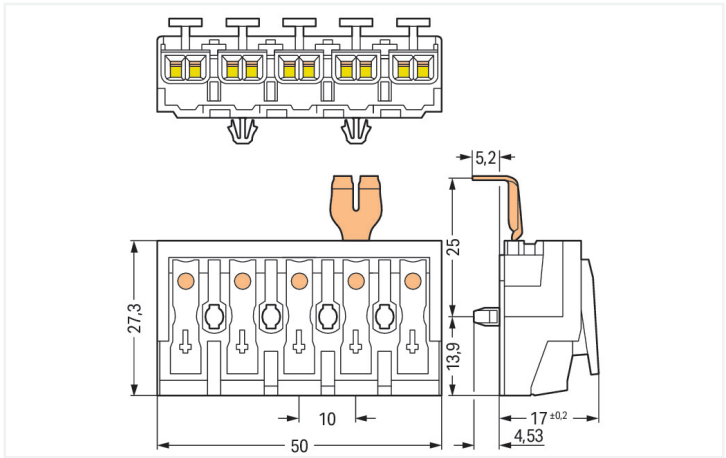

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data		Connection 1	
Connection points	25	Connection type 1	External 1
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
Number of connection types	4	Number of connection points	2
PE function	Snap-in PE contact	Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Pole number	5
		Wiring direction	Side-entry wiring



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		50 mm / 1.969 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	L3-L2-L1- -N
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.302 MJ
Halogen-free	Yes
Weight	16.3 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098409
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	022ba4bb-28d5-4321-896f-5c8f1b68074a
SCIP notification number (Belgium)	e5749dd6-4b24-4e9d-b813-bd262cf5ed30
SCIP notification number (Bulgaria)	56177a30-c7df-488b-8204-ef80cdf2daf8
SCIP notification number (Czech Republic)	2e19d484-b004-4381-a109-e2ae3b19396e
SCIP notification number (Denmark)	f09a3c01-d333-478c-b775-d9ac05202546
SCIP notification number (Finland)	7919370c-c6a0-4639-9c0d-4dc939d5b8c9
SCIP notification number (France)	b337aae6-f953-40f8-908c-b165ab0020a2
SCIP notification number (Germany)	e3795906-4012-40e5-bfda-c33ca26e0ffb
SCIP notification number (Hungary)	ea497c96-d063-435b-8526-02c5c2c3e57d
SCIP notification number (Italy)	6284b37b-1fb7-4771-b0f7-baf0c17aa592
SCIP notification number (Netherlands)	e9a0a03a-a622-4af9-8675-ea137d92997d
SCIP notification number (Poland)	6aab8dfa-556d-448e-a3ec-090eea6adb46
SCIP notification number (Romania)	25174a65-e708-41ef-9559-6328dc667a5f
SCIP notification number (Sweden)	6f8e772d-40d1-4b45-bfb3-258a71461e94



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-5215

↓

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	294-5215	13.06.2017
	↓	294-5215	19.02.2019
		doc 28.00 KB	↓
		xml 5.58 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 294-5215	WSCAD Universe 294-5215
↓	↓
	ZUKEN Portal 294-5215
	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white

[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool




1.1.2.2 Operating tool



Item No.: 206-294
Disconnection tool; green

Installation Notes

Installation




5-pole – with snap-in ground contact, d = 4.9 mm

Snap-in foot


Drilled hole for snap-in mounting foot

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

