


START Downlight Eco 95mm Round Recessed

START Downlight Eco 95 640lm 840
0053914



Product features

- START Downlight Eco is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 4000K.

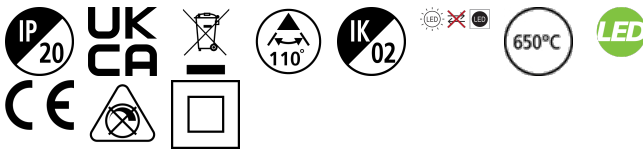

PRODUCT OVERVIEW

Product name	START Downlight Eco 95 640lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Useful luminous flux (Fuse)	640
Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288539140

PHOTOMETRY


START Downlight Eco 95mm Round Recessed

START Downlight Eco 95 640lm 840
0053914

0.5	1.56	607 E(CO)	87.2°	642 87
1.0	3.12	607 E(CO)	87.2°	321 71
1.5	4.67	607 E(CO)	87.2°	94 7
2.0	6.23	607 E(CO)	87.2°	69 4
2.5	7.79	607 E(CO)	87.2°	34 3
3.0	9.35	607 E(CO)	87.2°	22 2

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 114.6°)



TECHNICAL DRAWINGS

