


Interrata Fixed
INTERRATA XS IP67 CLEAR 100LM 830 NB
0049038



Product features

- Round shaped in-ground luminaire with fixed light module, walk-over for pressure loads to 500kg (5kN), comes with 2m 3x1mm2 flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 125lm, 2.7W, 46lm/W, CRI80, 12° beam angle, 50000 hrs L70 B50 lumen maintenance, 100mm diameter, 129mm recessing tube height, 0.42kg weight.

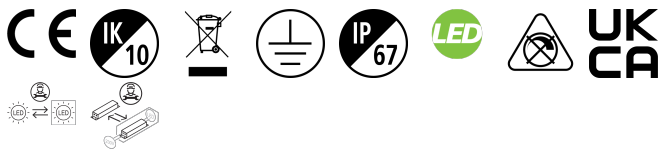

PRODUCT OVERVIEW

Product name	INTERRATA XS IP67 CLEAR 100LM 830 NB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
ETIM Class	EC000758
E-number FI	4579501
Warranty	5 years
Useful luminous flux (Fuse)	125
Fixture luminous flux (lm)	125
Luminaire efficacy (lm/W)	46
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	12
Photobiological Risk Group	RG0
Total power consumption (W)	2.7
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10

Interrata Fixed



INTERRATA XS IP67 CLEAR 100LM 830 NB

0049038

Product EAN number

5410288490380

PHOTOMETRY



TECHNICAL DRAWINGS

