



Data Sheet | Item Number: 294-5313

Lighting connector; push-button, external; with angled snap-in ground contact; N-PE-L; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5313>

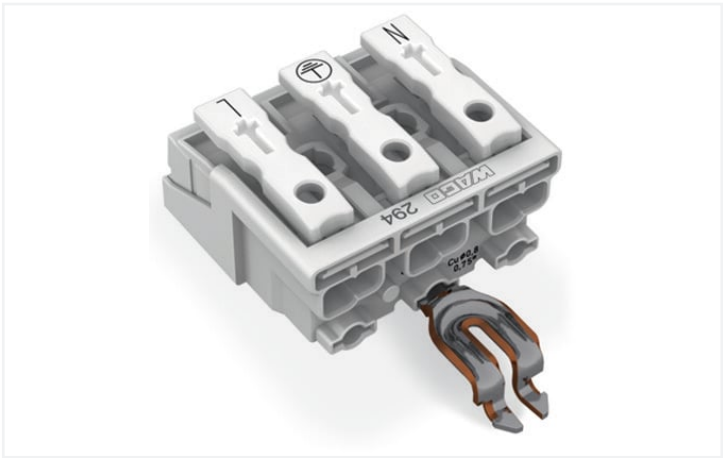

Color: white

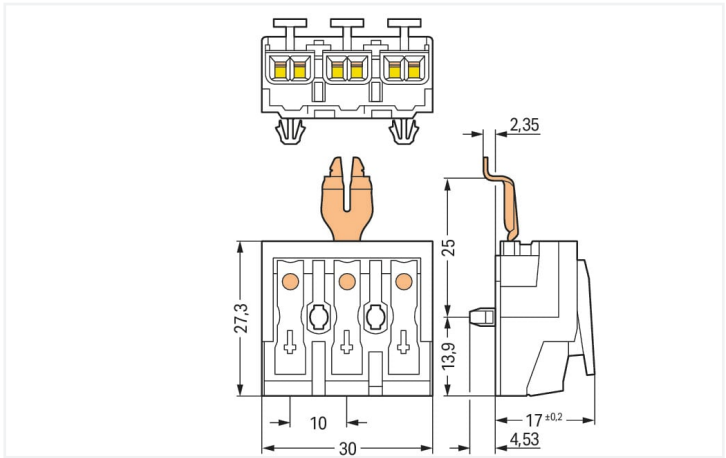

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data									
Connection points	15	Connection 1							
Total number of potentials	3	Connection type 1	External 1						
Number of connection types	4	Connection technology	Push-in CAGE CLAMP®						
PE function	Angled snap-in PE contact	Number of connection points	2						
		Actuation type	Push-button						
		Connectable conductor materials	Copper						
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG						
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches						
		Pole number	3						
		Wiring direction	Side-entry wiring						



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3	
Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	N- -L
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	10.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821020790
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	931779a3-5a3a-4b18-adfc-edef8de4d870
SCIP notification number (Belgium)	dd8bcd60-a6fa-4d1f-bb99-b4cc4ee3487e
SCIP notification number (Bulgaria)	7a0a1da9-c6b3-4829-a36e-42769ab7976d
SCIP notification number (Czech Republic)	71adb6c7-0a3b-4331-8f5a-05fa246c41e1
SCIP notification number (Denmark)	d2aecfd5-ff9e-41fd-9e97-8e9b9353292b
SCIP notification number (Finland)	fca79dfe-389d-4e2b-bac2-2e4aded5c937
SCIP notification number (France)	e7eee251-9259-4fd3-ae6f-bc8ab40d6b7c
SCIP notification number (Germany)	fdbe6e57-28de-4814-96dc-1d7bdbf76078
SCIP notification number (Hungary)	cfe09b2c-6db6-4716-b6f3-da6f6116f1ce
SCIP notification number (Italy)	cd1b155a-5af9-4d38-ac68-aa72d8991a96
SCIP notification number (Netherlands)	7d80cf02-53fd-4b22-9b2f-971e6349c17e
SCIP notification number (Poland)	5acb8db6-6778-4473-b936-d86fbd6a8d05
SCIP notification number (Romania)	1de4c856-7412-4653-ba53-f0bdb0c4cddf
SCIP notification number (Sweden)	4fc6d805-7864-4987-ad2f-d320f6dd0bd4



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-5313

↓

Documentation

Additional Information

Technical Section

pdf
2240.62 KB

↓

Bid Text

294-5313	13.06.2017	doc 28.00 KB	↓
294-5313	19.02.2019	xml 5.59 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
294-5313

↓

CAE data

WSCAD Universe
294-5313

↓

ZUKEN Portal
294-5313

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370 Strain relief; for 294 Series; with snap-in mounting feet; white	Item No.: 294-375 Strain relief; for 294 Series; without snap- in mounting feet; white
---	---

1.1.1.2 Strain relief plate



Item No.: 294-364

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool




Item No.: 206-294


Disconnection tool; green

Installation Notes


Installation



3-pole – with snap-in ground contact, d = 4.9 mm




Snap-in foot




Drilled hole for snap-in mounting foot

Conductor termination



EUROPE
1x 0.5 ... 2.5 mm ² "s"
1x 0.5 ... 1.5 mm ² "s"
1x 0.5 ... 0.75 mm ² "s"
AMERICA
1x AWG 18 ... 14 "s"
1x AWG 18 ... 16 "s"
1x AWG 18 "s"
JAPAN
1x 0.8 ... 1.6 mm diam. "s"
1x 0.8 ... 1 mm diam. "s"
1x 0.8 mm diam. "s"


EUROPE
2 x 0.5 ... 2.5 mm ² s, str, f-str*
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str*
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str*



Terminating five conductors per pole – solid and fine-stranded.

Internal connection:

PUSH WIRE® for internal wiring with solid conductors



External connection:

Push-in CAGE CLAMP® for field-wiring
with all conductor types

