

Features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Single body with 2 optical modules, 14200 lumens, 95W, 150lm/W, 4000K, CRI 80, aisle beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08, (LxWxH) 410x386x133mm, Mains + control cable of 2 meter. SylSmart Standalone enabled.


Product Overview

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Product name                    | Sylbay 4000K L2 14000LM AISLE SSC |
| Technology                      | LED                               |
| Cap/Base                        | N/A                               |
| Housing                         | Aluminium                         |
| Mount                           | Suspended                         |
| Fixture rating                  | Enclosed                          |
| Fixture luminous flux (lm)      | 14200                             |
| Luminaire efficacy (lm/W)       | 150                               |
| LOR (%)                         | 100                               |
| Colour temperature (K)          | 4000                              |
| Light colour                    | Neutral White                     |
| CRI (Ra)                        | 80                                |
| Colour Consistency (SDCM)       | 3                                 |
| Colour Variation Initial (SDCM) | 3                                 |
| Beam Angle (°)                  | 30*60                             |
| Glare control                   | < 21                              |
| Photobiological Risk Group      | RG1                               |
| Total power consumption (W)     | 95                                |
| Electrical protection           | Class I                           |
| Control gear type               | Electronic ballast                |

Sylbay 4000K L2 14000LM AISLE SSC  
0040359

|                       |               |
|-----------------------|---------------|
| Control gear mounting | Integral      |
| Housing colour        | Grey          |
| IP rating             | IP65          |
| IK rating             | IK08          |
| Product EAN number    | 5410288403595 |
| Warranty              | 5 years       |

## Photometry

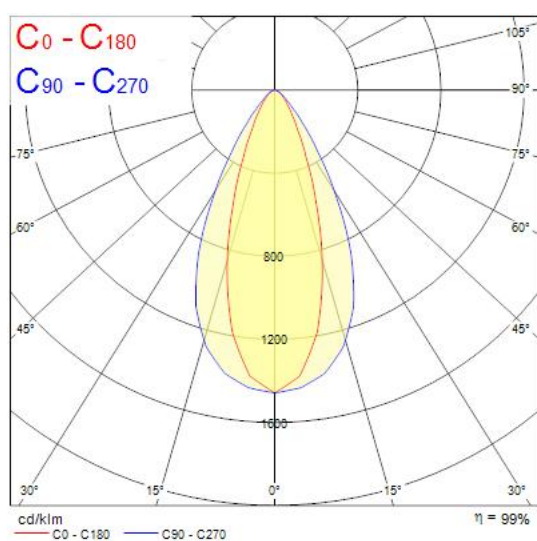

## Technical drawings

