

Interrata Fixed  
INTERRATA XS IP67 FROSTED 100LM 830  
0049036



Product features

- Round shaped in-ground luminaire with fixed light module, walk-over for pressure loads to 500kg (5kN), comes with 2m 3x1mm2 flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and frosted glass diffuser, IP67, IK10, Class I, non-dimmable, 115lm, 3.5W, 33lm/W, CRI80, 100° beam angle, 50000 hrs L70 B50 lumen maintenance, 100mm diameter, 129mm recessing tube height, 0.42kg weight.




PRODUCT OVERVIEW

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Product name                      | INTERRATA XS IP67 FROSTED 100LM 830                              |
| Technology                        | LED                                                              |
| Cap/Base                          | N/A                                                              |
| Housing                           | Aluminium                                                        |
| Mount                             | Ground recessed                                                  |
| General application               | Hospitality, Museums & Galleries, Office, Residential & Consumer |
| ETIM Class                        | EC000758                                                         |
| E-number FI                       | 4579499                                                          |
| Warranty                          | 5 years                                                          |
| Useful luminous flux (Fuse)       | 115                                                              |
| Fixture luminous flux (lm)        | 115                                                              |
| Luminaire efficacy (lm/W)         | 33                                                               |
| Correlated colour temperature (k) | 3000                                                             |
| Colour Code                       | 830                                                              |
| Light colour                      | Warm White                                                       |
| CRI (Ra)                          | 80                                                               |
| Colour Variation Initial (SDCM)   | SDCM5                                                            |
| Beam Angle (°)                    | 100                                                              |
| Photobiological Risk Group        | RG0                                                              |
| Total power consumption (W)       | 3.5                                                              |
| Electrical protection             | Class I                                                          |
| Dimmable                          | No                                                               |
| LED Flickering Rate               | Low (6% - 20%)                                                   |
| Housing colour                    | Stainless steel                                                  |
| IP rating                         | IP67                                                             |
| IK rating                         | IK10                                                             |
| Product EAN number                | 5410288490366                                                    |

PHOTOMETRY

Interrata Fixed  
INTERRATA XS IP67 FROSTED 100LM 830  
0049036

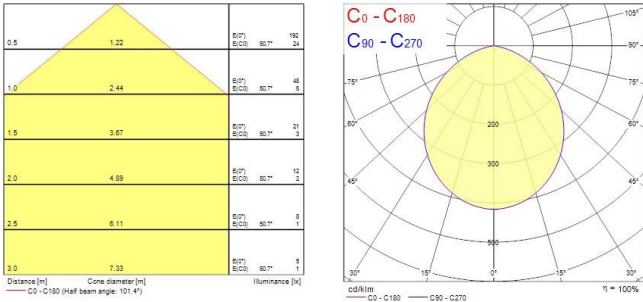

TECHNICAL DRAWINGS

