


Start Waterproof LED G3 fixed output

START Waterproof Twin 1500 IP65 7100lm 840
0067956

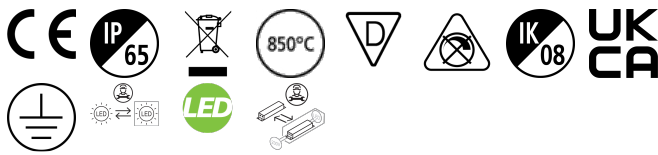

PRODUCT OVERVIEW

Product name	START Waterproof Twin 1500 IP65 7100lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
E-number FI	4306954
Warranty	5 years
Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679563

DATA TABLE

General data

Product name	START Waterproof Twin 1500 IP65 7100lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Operating temperature range (°C)	-20°C...+40°C

Start Waterproof LED G3 fixed output *START Waterproof Twin 1500 IP65 7100lm 840* 0067956

Performance ambient temperature Tq (°C)	25
E-number FI	4306954
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	58
Lamp power factor	0.91
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	700
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	25
Max. products per 20A B Breaker	50

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	59000
Lifespan L90 B20	53000
Lifespan L90 B10	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	110
Weight (kg)	2.42

Packaging

Single packaging type	Carton
Product EAN number	5410288679563


Start Waterproof LED G3 fixed output *START Waterproof Twin 1500 IP65 7100lm 840* 0067956

Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288679563
Packaging outer length / height (cm)	167.2

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

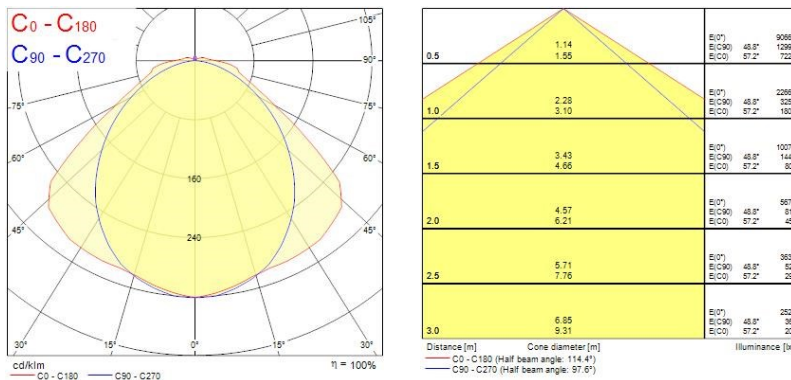

TECHNICAL DRAWINGS

