


Start Waterproof LED G3 fixed output

START Waterproof Twin 1500 IP65 7100lm 840
0067956

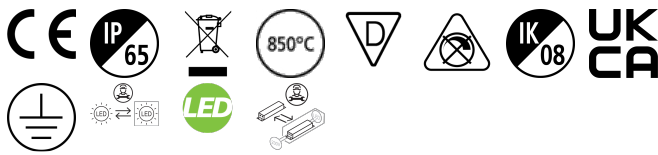


PRODUCT OVERVIEW

Product name	START Waterproof Twin 1500 IP65 7100lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
E-number FI	4306954
Warranty	5 years
Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679563

PHOTOMETRY

Start Waterproof LED G3 fixed output *START Waterproof Twin 1500 IP65 7100lm 840* 0067956

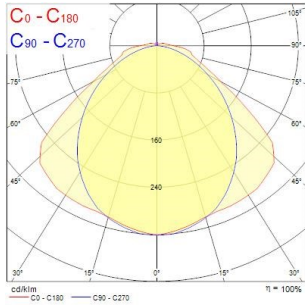

Distance [m]	Cone diameter [m]	Beam type	Illuminance [lx]
0.5	1.14	E0°	9096
	1.92	E(C)90° 48.8°	1299
		E(C)0° 87.2°	722
1.0	2.28	E0°	2268
	3.10	E(C)90° 48.8°	323
		E(C)0° 87.2°	160
1.5	3.43	E0°	1027
	4.66	E(C)90° 48.8°	144
		E(C)0° 87.2°	83
2.0	4.57	E0°	687
	6.21	E(C)90° 48.8°	111
		E(C)0° 87.2°	65
2.5	5.71	E0°	363
	7.76	E(C)90° 48.8°	53
		E(C)0° 87.2°	29
3.0	6.85	E0°	252
	9.31	E(C)90° 48.8°	78
		E(C)0° 87.2°	23

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 114.4°)
 — C90 - C270 (Half beam angle: 87.6°)

TECHNICAL DRAWINGS

