


Sylbay 4000K L6 47000LM AISLE DALI
0040315

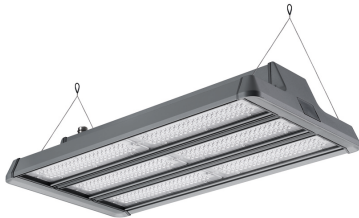

Features

• Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Twin body with 6 optical modules, 47400 lumens, 327W, 145lm/W, 4000K, CRI 80, aisle beam optic, DALI dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08, (LxWxH) 726x386x133mm, Mains + control cable of 2 meter.


Product Overview

Product name	Sylbay 4000K L6 47000LM AISLE DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
Fixture luminous flux (lm)	47400
Luminaire efficacy (lm/W)	145
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	327
Electrical protection	Class I

Sylbay 4000K L6 47000LM AISLE DALI 0040315

Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403151
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	47400

Photometry

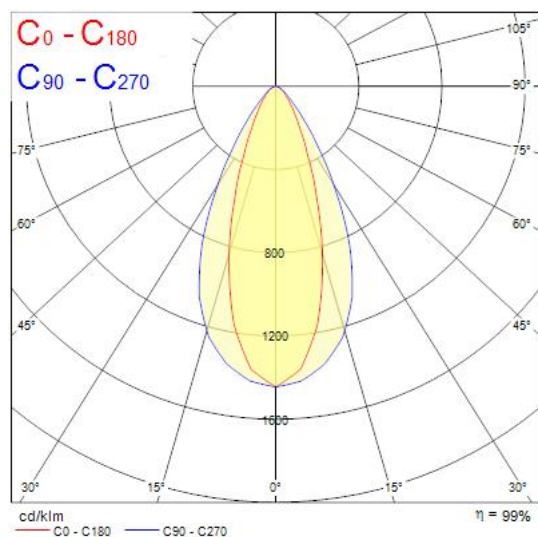

Technical drawings

