


Giotto LED 305  
GIOTTO 305 4000K RECESSED 1-10V MW SENSOR  
3034778



Product features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 14.7W, 119lm/W, 4000K, CRI 80, 1-10V dimmable, integral microwave sensor. 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

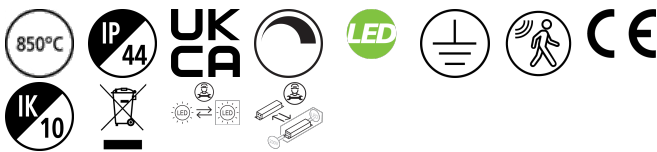


PRODUCT OVERVIEW

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | GIOTTO 305 4000K RECESSED 1-10V MW SENSOR |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | PC Polycarbonate                          |
| Mount                           | Ceiling recessed mounting                 |
| Environment                     | Indoor                                    |
| General application             | Hospitality, Logistics & Industry         |
| ETIM Class                      | EC002892                                  |
| E-number FI                     | 4270189                                   |
| Warranty                        | 5 years                                   |
| Fixture luminous flux (lm)      | 1750                                      |
| Luminous flux (lm)              | 1750                                      |
| Luminaire efficacy (lm/W)       | 119                                       |
| Colour temperature (K)          | 4000                                      |
| Colour Code                     | 840                                       |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | SDCM3                                     |
| Beam Angle (°)                  | 120                                       |
| Glare control                   | < 25                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 14.7                                      |
| Electrical protection           | Class I                                   |
| Control gear type               | LED driver constant current               |
| Control gear mounting           | Integrated                                |
| Dimmable                        | Yes                                       |
| Dimming method                  | 1-10V (Analogue)                          |
| LED Flickering Rate             | Ultra low (5% or less)                    |
| Housing colour                  | White                                     |
| IP rating                       | IP44                                      |
| IK rating                       | IK10                                      |
| Product EAN number              | 8711971347781                             |

Giotto LED 305  
GIOTTO 305 4000K RECESSED 1-10V MW SENSOR  
3034778

PHOTOMETRY

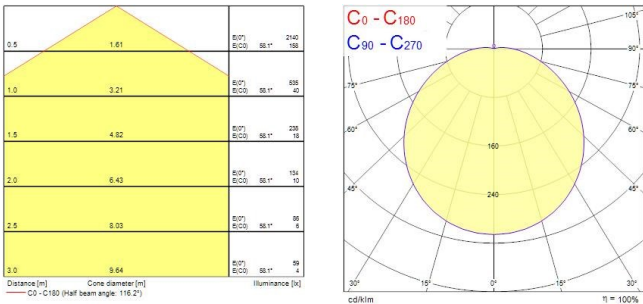

TECHNICAL DRAWINGS

