

SylBay - DALI

Sylbay 4000K L2 19500LM WIDE DALI

0040306



Product features

- Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Single body with 2 optical modules, 19000 lumens, 135W, 141lm/W, 4000K, CRI 80, wide beam optic, DALI dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08, (LxWxH) 410x386x133mm, Mains + control cable of 2 meter. Ball-impact-resistance according to VDE 0710-13 in suspended mounting mode.




PRODUCT OVERVIEW

Product name	Sylbay 4000K L2 19500LM WIDE DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
Warranty	5 years
Useful luminous flux (Fuse)	19000
Fixture luminous flux (lm)	19000
Luminaire efficacy (lm/W)	141
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	75
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	135
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Dimming method	DALI
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403069

SylBay - DALI
Sylbay 4000K L2 19500LM WIDE DALI
0040306

PHOTOMETRY

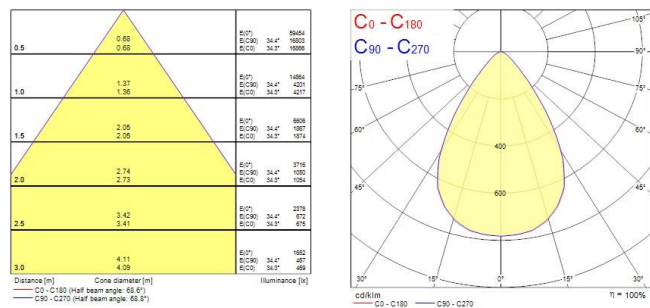

TECHNICAL DRAWINGS

