


Data Sheet | Item Number: 294-5423

Lighting connector; push-button, external; with screw-type ground contact; 3-pole;
Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²;
Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5423>



Color: white

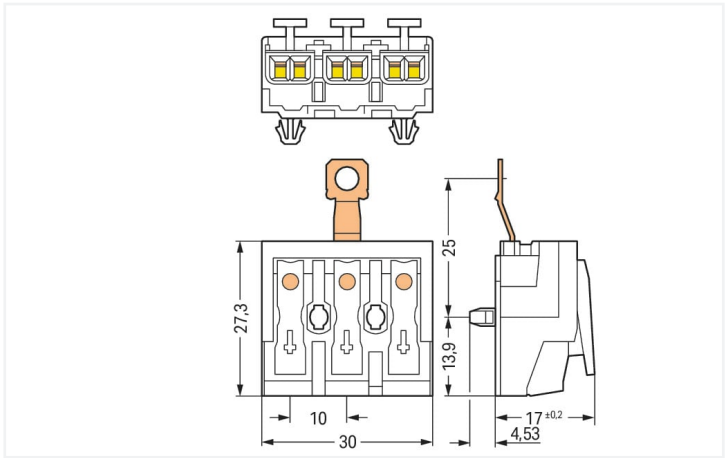

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data		
Connection points	15	Connection 1 Connection type 1 External 1 Connection technology Push-in CAGE CLAMP® Number of connection points 2 Actuation type Push-button Connectable conductor materials Copper Solid conductor 0.5 ... 2.5 mm² / 18 ... 12 AWG Solid conductor; push-in termination 0.5 ... 2.5 mm² / 18 ... 12 AWG Stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor; with insulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with uninsulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with ferrule; push-in termination 0.5 mm² / 18 AWG Strip length 8 ... 9 mm / 0.31 ... 0.35 inches Pole number 3 Wiring direction Side-entry wiring
Total number of potentials	3	
Number of connection types	4	
PE function	Screw-type PE contact	



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	N´ - - L´
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	9.9 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098591
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	e19f2e5c-6cef-4600-a8b9-606ce45d8081
SCIP notification number (Belgium)	f99e137f-8746-4a51-8e1b-296abfa38a36
SCIP notification number (Bulgaria)	2cec2886-0fab-42ea-af7e-d413bbe1a9a5
SCIP notification number (Czech Republic)	0582a865-2f48-4ead-b596-83c0cd5ec72d
SCIP notification number (Denmark)	de0c3097-f2f1-49fa-b14e-0f2a71bd2c56
SCIP notification number (Finland)	5b7571a3-1e24-4736-b2c2-166fad4b1a5b
SCIP notification number (France)	7573c903-53fd-4d98-8e79-545bf2de7864
SCIP notification number (Germany)	5abb4484-8bc4-4a69-8134-ead10d74f644
SCIP notification number (Hungary)	b939a9ed-87dd-465b-ae55-d3816c487536
SCIP notification number (Italy)	85af4b23-a6a8-454e-b399-04395592e726
SCIP notification number (Netherlands)	7f067548-76f0-4eff-8ce0-955720cb2a80
SCIP notification number (Poland)	6fcce1cb-d11b-4659-a8fa-464d6a956fbf
SCIP notification number (Romania)	1bdb4cec-9c74-4936-ba6a-7cfa088885ef
SCIP notification number (Sweden)	a5f2368f-ebb0-48d8-8db5-0ac391e00ee3



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-5423

↓

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	294-5423	13.06.2017
	↓	294-5423	19.02.2019
		doc 28.00 KB	↓
		xml 5.59 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 294-5423	WSCAD Universe 294-5423
↓	↓
	ZUKEN Portal 294-5423
	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370 Strain relief; for 294 Series; with snap-in mounting feet; white	Item No.: 294-375 Strain relief; for 294 Series; without snap- in mounting feet; white
---	---

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool




1.1.2.2 Operating tool



Item No.: 206-294
Disconnection tool; green

Installation Notes

Installation




3-pole – with screw-type ground contact, $d \leq 4.1$ mm

Snap-in foot


Drilled hole for snap-in mounting foot

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

