
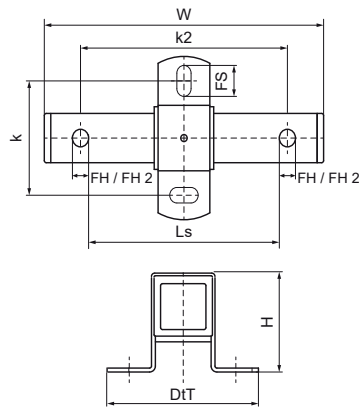


## Walraven Expansion Guide Assembly (BUP1000)

(E1040)

fixing with sliding assemblies



### Features & benefits

- stable support for accommodation of pipe thermal expansion or contraction
- fix directly on the building structure or in combination with rail systems
- suitable for ceiling mounting (suspended) and floor mounting (standing mounted)
- tapped with different sized threads on opposing faces
- a variety of connection possibilities, can be combined with Bifix® G2 or HD1501 pipe clamps etc.
- material: metal parts made of steel; plastic parts made of PE
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



| Product Number   | Fixing Hole | Fixing Hole 2 | Anchoring Slot | Slide Distance | Heart To Heart Distance | Heart To Heart Distance 2 | Maximum Allowed Load Faz |
|------------------|-------------|---------------|----------------|----------------|-------------------------|---------------------------|--------------------------|
| Reference Letter | FH          | FH 2          | AS             | Ls             | k                       | k 2                       | Fo,z                     |
| Unit description | mm          | mm            | mm             | mm             | mm                      | mm                        | N                        |
| 6668813          | 13          | 17            | 20x13          | 120            | 100                     | 200                       | 7,500                    |