

RELIABLE AND QUICK INSTALLATION ON PITCHED ROOFS



EPDM AND BITUMEN ROOF

www.esdec.com

THE 4 COMPONENTS OF CLICKFIT EVO



1. CLICKFIT EVO HANGER BOLT

- Fully preassembled hanger bolt
 Height adjustable
 Compensates for roof irregularities up to 10 degrees

- Compensates for roof irregularities up to 10 degrees
 Can be rotated by 360 degrees
 Self-aligning click connection: easy and quick
 Mounting rail can be installed horizontally or vertically
 For both landscape and portrait positioning of solar panels
 For new builds and existing buildings
 Available in three lengths and two thicknesses for wood purlins/ trusses




2. MOUNTING RAIL

- Quick and easy to click into the ClickFit EVO click connection on the hook
- Available in different lengths
- Rails can be coupled with a coupler



3. UNIVERSAL MODULE CLAMP

- Suitable for all framed solar panels
- Can be used as centre clamp or as end clamp in combination with end cap
- Standard assembly
- Including equipotential bonding for the solar panels
- · Available in grey and black



4. END CAP

- End cap holds the module clamp in its position
- · Elongated end cap to allow for aesthetically pleasing finish

Available in grey and black



EPDM AND BITUMEN ROOF



EASY INSTALLATION ON THE ROOF

ClickFit EVO for EPDM and Bitumen Roofs

ClickFit EVO for EPDM and Bitumen Roofs has been specially developed for use with the well-known ClickFit EVO system on EPDM and bitumen roofs, as are often found on business premises with pitched roofs. This straightforward system consists of just four components and can be installed on both existing and new roofs. The preassembled hanger bolt features the familiar ClickFit Evo click connection. The unique universal properties of this system let you install solar panels quickly and easily on pitched roofs.

The hanger bolt compensates for roof irregularities of up to 10 degrees

With the ClickFit EVO Hanger Bolt, you can quickly install solar panels on all types of EPDM and bitumen roofs. The hanger bolt is provided pre-assembled and the flexible adapter allows you to easily and quickly compensate for roof irregularities of up to 10 degrees. Using the universal ClickFit EVO click connection fitted to the hanger bolt as standard, you can simply carry on working with familiar components from the ClickFit EVO product line, such as universal rails, module clamps and end caps. As well as being suitable for EPDM and bitumen roofs, the hanger bolt can also be used on corrugated, steel and Arabic tiles.

Mounting on an EPDM and bitumen roof

Not all types of EPDM and bitumen roofs are suitable for mounting with hanger bolts: in this case the thermal effect, and thus the watertightness, of the roof covering is affected as soon as it has been drilled into. Therefore, consult a roofing specialist for advice before installing.


If the roof substructure is made from an engineered wood board with a minimum thickness of 50 mm, you can install the hanger bolts where you want. Otherwise, you must first locate the purlins/trusses. The hanger bolt must then be mounted in the purlin/truss. It is also important to ensure the area is waterproofed again when mounting the hanger bolt on an EPDM or bitumen roof. To do this, use a sealant suitable for the type of roof covering and the corresponding washer. You can even include these in your original order, it couldn't be easier! The project plan created by our calculator includes details of exactly how much sealant and how many washers you require.

ADVANTAGES FOR THE INSTALLER

- Both landscape and portrait placement
- 🖉 🛛 Four components on the roof
- 🤣 🛛 Only one tool needed
- Quick and easy installation
- 20-year product warranty

ADVANTAGES FOR YOUR CUSTOMER

- ✓ 100% waterproof
- Aesthetic design, also available in black
- Comprehensively tested
- 🤣 20-year product warranty

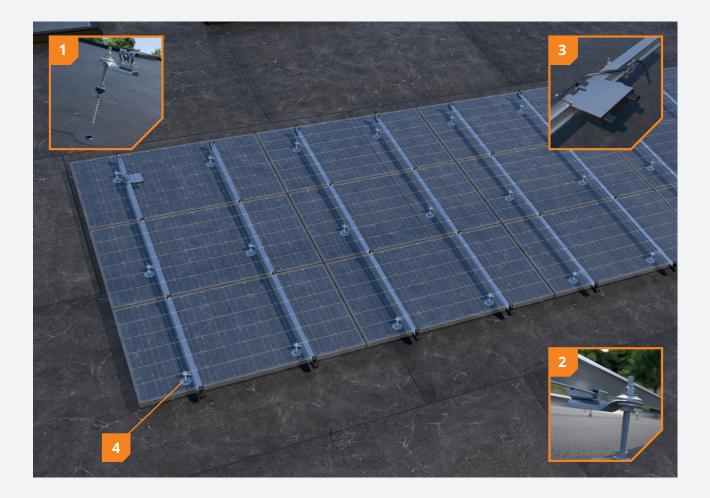

1 Unique hanger bolt

The hanger bolt is delivered in preassembled form. Using the flexible adapter, the hanger bolt can also compensate for roof irregularities of up to 10 degrees.

Fitted with a ClickFit EVO click connection

The hanger bolt features a self-aligning click connection. This makes it easy to install the mounting rail from above. Integrated cable management

Cables and connectors are neatly and securely held in place in the hanger bolt. You can also simply click the optimizer or microinverter onto the rail with the MLPE clip.

4 Always the right size

The universal module clamp is adjustable in height and therefore suitable for solar panels with a frame thickness between 30 and 50 mm. Due to its smart design, this panel clamp can be used as a mid clamp and as an end clamp (in combination with the end cap).

ROOF FASTENERS



ClickFit EVO Hanger Bolt	
M10x200mm	1008011
M10x250mm	1008012
M12x250mm	1008013
M12x300mm	1008014
M12x350mm	1008015 [DTO]

MOUNTING RAIL



1008131 1008132 1008133 1008007 1008134 Mounting rail 5770mm 1008135

MODULE CLAMP & END CAP



ClickFit EVO Module Clamp Universal grey 1008020



ClickFit EVO Module Clamp Universal black 1008020-B



ClickFit EVO Mounting rail End cap grey 1008060



ClickFit EVO Mounting rail End cap black 1008060-B



ClickFit EVO End Cap without end clamp support grey 1008066 ClickFit EVO End Cap without end clamp support black



1008066-B ClickFit EVO End Clamp Support grey



1008065



ClickFit EVO End Clamp Support black 1008065-B

ACCESSORIES



ClickFit EVO Mounting Rail Connector Piece 1008061

ClickFit EVO MLPE Clip Light Weight up to 2kg 1008067

ClickFit EVO MLPE Clip Heavy Weight from 2 to 8kg

1008068

Self drilling screw 6.3x42mm SW10/T30 1003016 (required for vertical rail installation)



ClickFit EVO Auxiliary set with cable clip 1008064



ClickFit EVO bit torx 30 1008069

Hanger Bolt Washer Inox 80mm 1003070

Calculator

In the Esdec calculator you can manage and calculate all your projects, for both pitched and flat roofs. One platform with all Esdec mounting systems for the most reliable calculation of your project.

Save time: manage all your projects on one platform \checkmark

One calculator for projects on pitched and flat roofs



Go to esdec.com/en/calculator

Warranty

ClickFit EVO meets all of the requirements and standards that currently apply. ClickFit EVO comes with a unique 20-year warranty, thus ensuring the system's quality.

- Use of premium high tech materials \checkmark
- \checkmark Extensively tested







BUILDING VALUE[®]FOR SOLAR PROFESSIONALS

Esdec

Londenstraat 16 7418 EE Deventer The Netherlands

↓ +31 850 702 000
 ➢ info@esdec.com