

Start Waterproof LED G3 fixed output
START Waterproof Single 1200 IP65 2800lm 865
0067963



PRODUCT OVERVIEW

Product name	START Waterproof Single 1200 IP65 2800lm 865
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
E-number FI	4309081
Warranty	5 years
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	125
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	22
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679631

DATA TABLE

General data	
Product name	START Waterproof Single 1200 IP65 2800lm 865
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Operating temperature range (°C)	-20°C...+40°C

Start Waterproof LED G3 fixed output

START Waterproof Single 1200 IP65 2800lm 865
0067963

Performance ambient temperature Tq (°C)	25
E-number FI	4309081
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	125
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	22
Lamp power factor	0.95
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	350
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	60
Max. products per 20A B Breaker	121

Lifetime data

Lifespan L80 B10	60000
Lifespan L90 B50	59000
Lifespan L90 B20	53000
Lifespan L90 B10	50000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1278
Nominal Product Width (mm)	84
Weight (kg)	1.61

Packaging


Single packaging type	Carton
Product EAN number	5410288679631
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288679631
Packaging outer length / height (cm)	137.2

Start Waterproof LED G3 fixed output
START Waterproof Single 1200 IP65 2800lm 865
0067963

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

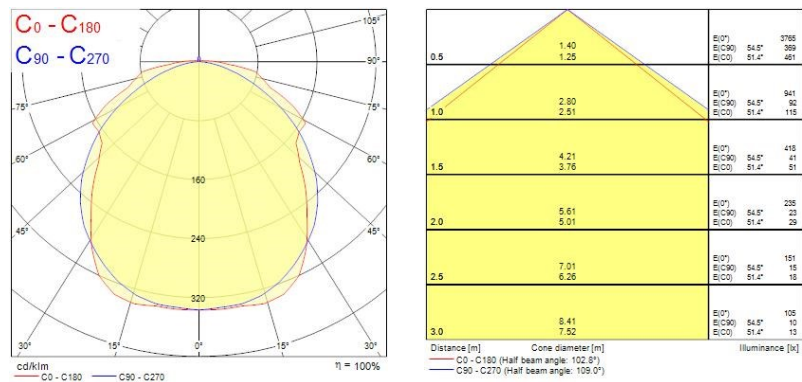

TECHNICAL DRAWINGS

