


## Data Sheet | Item Number: 216-414

Ferrule; Sleeve for 35 mm<sup>2</sup> / AWG 2; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored

<https://www.wago.com/216-414>



Color: ■ silver-colored

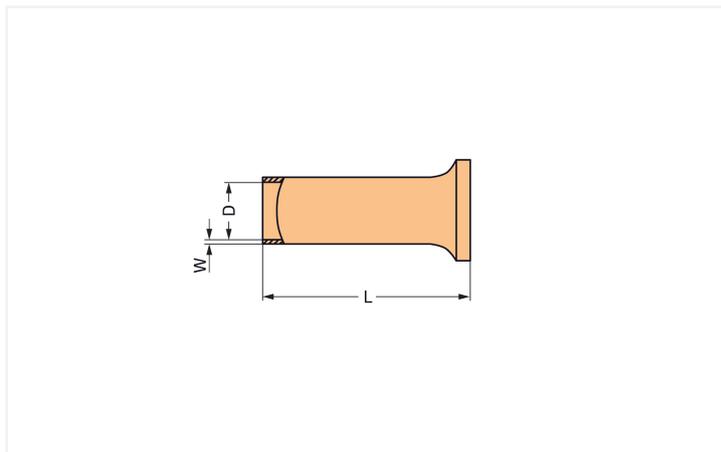

Dimensions in mm

### Connection Data

Metric cross-section of the ferrule	35 mm <sup>2</sup>
Strip length	25 mm / 0.98 inches
Cross-section (AWG) of ferrule	2 AWG

### Physical data

Total length	25 mm
Wall thickness of crimp sleeve	0.2 mm
Diameter crimp sleeve inside	8.3 mm

### Mechanical data

Plastic collar	No
----------------	----

### Material data

Color	silver-colored
Fire load	0 MJ
Weight	1.3 g

### Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821134183
Customs tariff number	85369010000

Product Classification	
UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

## Downloads

### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-414	↓

## Documentation

Bid Text			
216-414	19.02.2019	xml 2.77 KB	↓
216-414	11.09.2017	doc 24.00 KB	↓

## Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable