


Data Sheet | Item Number: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

<https://www.wago.com/216-264>

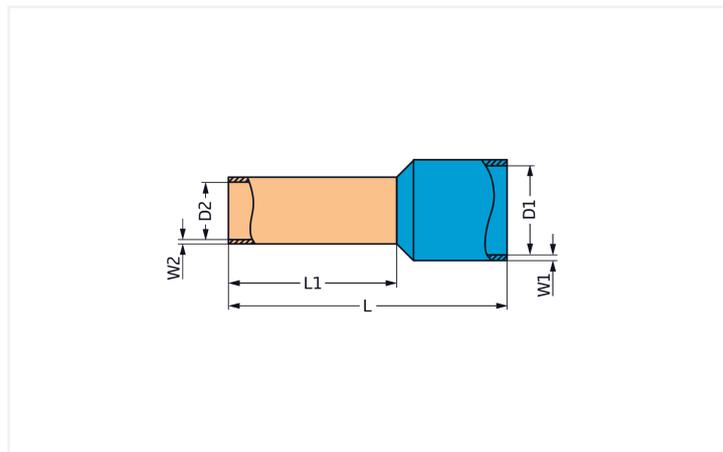

Color: ■ black

Similar to illustration

Dimensions in mm

Connection Data

Metric cross-section of the ferrule	1.5 mm ²
Strip length	14 ... 15 mm / 0.55 ... 0.59 inches
Cross-section (AWG) of ferrule	16 AWG

Physical data

Total length	18 mm
Wall thickness of crimp sleeve	0.15 mm
Wall thickness (plastic collar)	0.25 mm
Crimp length (length of sleeve)	12 mm
Inner diameter of plastic collar	3.5 mm
Diameter crimp sleeve inside	1.7 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2002 to 2006 Series

Material data

Color	black
Fire load	0.001 MJ
Weight	0.2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918604291
Customs tariff number	85369010000

Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads


Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-264	↓

Documentation

Bid Text			
216-264	19.02.2019	xml 2.80 KB	↓
216-264	11.09.2017	doc 23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com