


Data Sheet | Item Number: 216-424

Ferrule; Sleeve for 35 mm² / AWG 2; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored

<https://www.wago.com/216-424>



Color: ■ silver-colored

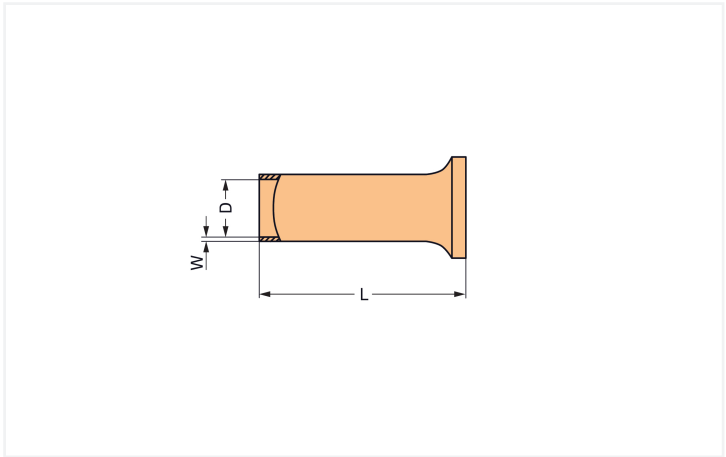

Dimensions in mm

Connection Data		
Metric cross-section of the ferrule		35 mm²
Strip length		30 mm / 1.18 inches
Cross-section (AWG) of ferrule		2 AWG

Physical data		
Total length		30 mm
Wall thickness of crimp sleeve		0.2 mm
Diameter crimp sleeve inside		8.3 mm

Mechanical data		
Plastic collar		No

Material data		
Color		silver-colored
Fire load		0 MJ
Weight		1.5 g

Commercial data		
Product Group		2 (Terminal Block Accessories)
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821134190
Customs tariff number		85369010000



Product Classification		
UNSPSC		39121405
eCl@ss 10.0		27-40-02-01
eCl@ss 9.0		27-40-02-01
ETIM 9.0		EC000005
ETIM 10.0		EC000005
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-424

↓

Documentation				
Bid Text				
216-424	19.02.2019	xml	2.77 KB	↓
216-424	11.09.2017	doc	24.00 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable