


Data Sheet | Item Number: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

<https://www.wago.com/216-244>

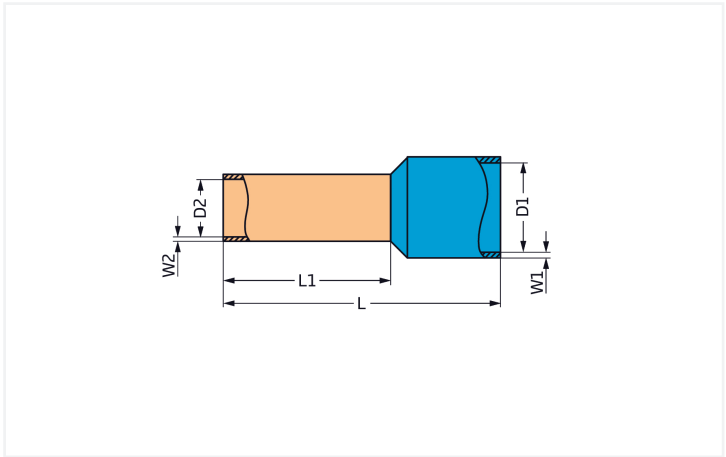

Color: ■ black

Similar to illustration

Dimensions in mm

Connection Data		
Metric cross-section of the ferrule		1.5 mm²
Strip length		12 ... 13 mm / 0.47 ... 0.51 inches
Cross-section (AWG) of ferrule		16 AWG

Physical data		
Total length		16 mm
Wall thickness of crimp sleeve		0.15 mm
Wall thickness (plastic collar)		0.25 mm
Crimp length (length of sleeve)		10 mm
Inner diameter of plastic collar		3.5 mm
Diameter crimp sleeve inside		1.7 mm

Mechanical data		
Plastic collar		Standard collar
Suitable		2001 – 2002 Series

Material data		
Color		black
Fire load		0.002 MJ
Weight		0.1 g



Commercial data		
Product Group	2 (Terminal Block Accessories)	
PU (SPU)	1000 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4044918016346	
Customs tariff number	85369010000	

Product Classification		
UNSPSC	39121405	
eCl@ss 10.0	27-40-02-01	
eCl@ss 9.0	27-40-02-01	
ETIM 9.0	EC000005	
ETIM 10.0	EC000005	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant,No Exemption	

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-244

↓

Documentation				
Bid Text				
216-244	19.02.2019	xml	2.80 KB	↓
216-244	11.09.2017	doc	23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com