

Start Highbay
START Highbay IP65 1-10V 19000lm 840 WB
0039348



Product features

- START Highbay, includes 1 m cables, black aluminium housing, 19,500 Lm, 150 W, 130 Lm/W, 4000 K, drive current: 3210 mA, CRI 80, 90° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 296 x 177 mm, 1 m mains cable, 1 m control cable, 1.2 m chain lenght including hooks




PRODUCT OVERVIEW

Product name	START Highbay IP65 1-10V 19000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4306961
E-number SE	7214415
Warranty	5 years
Useful luminous flux (Fuse)	19500
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	130
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	150
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	1-10V (Analogue)
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393483

Start Highbay
START Highbay IP65 1-10V 19000lm 840 WB
0039348

PHOTOMETRY

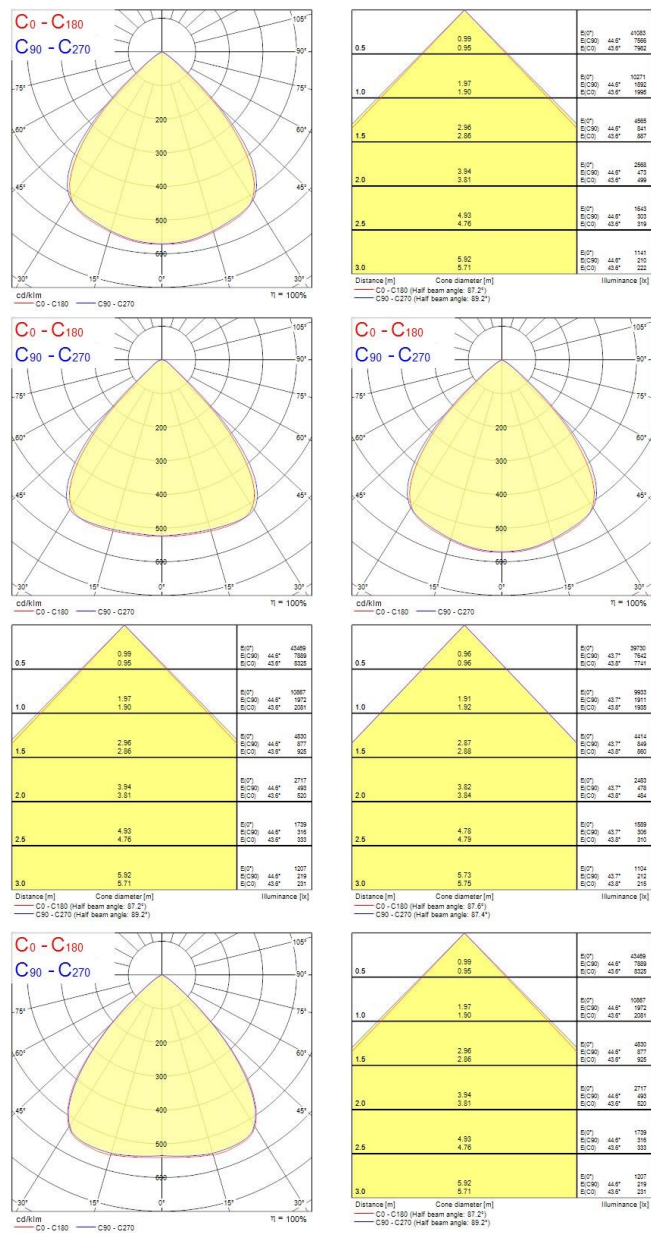

TECHNICAL DRAWINGS

Start Highbay

START Highbay IP65 1-10V 19000lm 840 WB

0039348

