
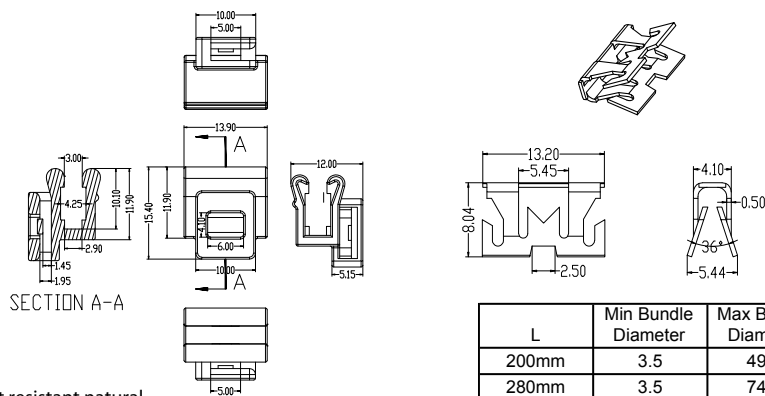


Tolerance unspecified
mm (inch)
X.XXX ±0.1 (0.004)
X.XX ±0.25 (0.010)
X.X ±0.5 (0.02)
X. ±1.0 (0.04)
ANGULAR ± 2°

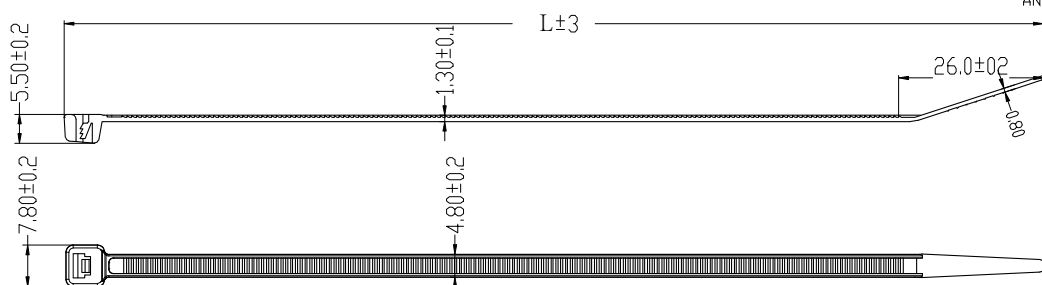

L	Min Bundle Diameter	Max Bundle Diameter	Tensile strength
200mm	3.5	49.5	23 kgs
280mm	3.5	74.8	23 kgs
360mm	3.5	100	23 kgs

1. MATERIAL Natural: Polyamide 6.6 heat resistant natural
2. MATERIAL Black: Polyamide 6.6 heat resistant UV Black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: -10° C ÷ +85° C
6. Working temperature: -40° C ÷ +85° C
7. Max sustainable temperature for short time: +110°C
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. comply with UL62275, and EN62275

						PRODUCT DRAWING					
						Step		Qty	Weight	Ratio	Edge Clip Cable Ties
Rev	Qty	Rev number	Sign	Date				1			
Authorization		Standard	Checked	Design							
Aral Y		Aral Y	LIU MZ	Fanka			UNIT:MM				
					Total page: 1		page: 1				