


## Data Sheet | Item Number: 216-425

Ferrule; Sleeve for 50 mm<sup>2</sup> / AWG 1; uninsulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 1/08.92

<https://www.wago.com/216-425>

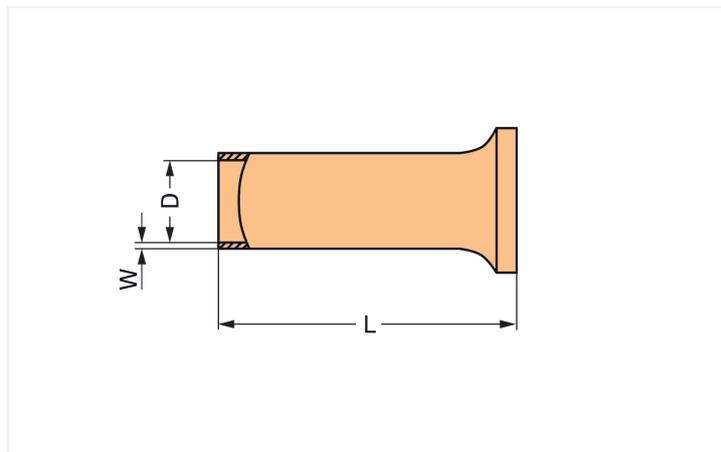

Dimensions in mm

### Connection data

Metric cross-section of the ferrule	50 mm <sup>2</sup>
Strip length	30 mm / 1.18 inches
Cross-section (AWG) of ferrule	1/0 AWG

### Physical data

Total length	30 mm
Wall thickness of crimp sleeve	0.3 mm
Diameter crimp sleeve inside	10.3 mm

### Mechanical data

Plastic collar	No
----------------	----

### Material data

Fire load	0 MJ
Weight	3.2 g

### Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821134206
Customs tariff number	85369010000

### Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 8.0	EC000005
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

### Downloads

#### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-425	<a href="#">↓</a>

### Documentation

Bid Text			
216-425	19.02.2019	xml 2.77 KB	<a href="#">↓</a>
216-425	11.09.2017	doc 24.00 KB	<a href="#">↓</a>

### Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable