


Data Sheet | Item Number: 216-435

Ferrule; Sleeve for 50 mm² / AWG 1; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

<https://www.wago.com/216-435>

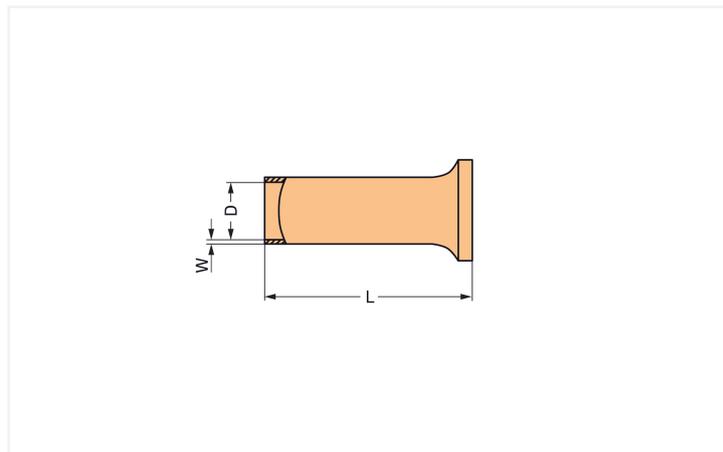

Dimensions in mm

Connection Data

Metric cross-section of the ferrule	50 mm ²
Strip length	35 mm / 1.38 inches
Cross-section (AWG) of ferrule	1/0 AWG

Physical data

Total length	35 mm
Wall thickness of crimp sleeve	0.3 mm
Diameter crimp sleeve inside	10.3 mm

Mechanical data

Plastic collar	No
----------------	----

Material data

Fire load	0 MJ
Weight	3 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821134213
Customs tariff number	85369010000

Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-435	↓
--	---

Documentation

Bid Text			
216-435	19.02.2019	xml 2.77 KB	↓
216-435	11.09.2017	doc 24.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable