



### Features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1625lm, 16W, 102lm/W, 3000K, CRI 80, non-dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

### Product Overview


<b>Product name</b>	GIOTTO 305 3000K RECESSED EMERGENCY
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling recessed mounting
<b>Environment</b>	Indoor
<b>Fixture luminous flux (lm)</b>	1625
<b>Luminaire efficacy (lm/W)</b>	102
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 24
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	128
<b>Total power consumption (W)</b>	16
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Control gear mounting</b>	Integrated

# Lumiance

## GIOTTO 305 3000K RECESSED EMERGENCY 3034783

LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347835
Warranty	5 years
Colour Code	830

### Photometry

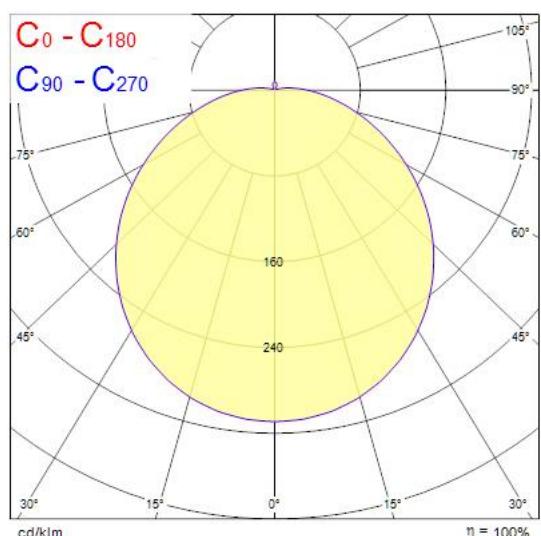

### Technical drawings

