


Data Sheet | Item Number: 216-210

Ferrule; Sleeve for 16 mm² / AWG 6; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

<https://www.wago.com/216-210>



Color: ■ blue

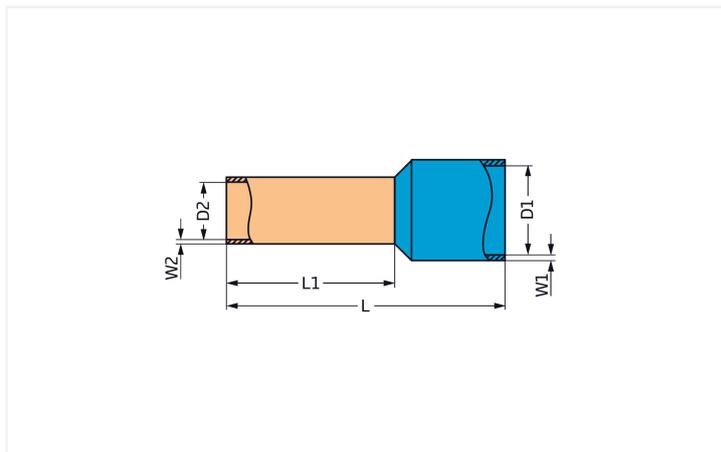

Dimensions in mm

Connection Data

Metric cross-section of the ferrule	16 mm ²
Strip length	23 ... 24 mm / 0.91 ... 0.94 inches
Cross-section (AWG) of ferrule	6 AWG

Physical data

Total length	28 mm
Wall thickness of crimp sleeve	0.2 mm
Wall thickness (plastic collar)	0.4 mm
Crimp length (length of sleeve)	18 mm
Inner diameter of plastic collar	8.8 mm
Diameter crimp sleeve inside	5.8 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2016 Series

Material data

Color	blue
Fire load	0.001 MJ
Weight	0.8 g

Commercial data	
Product Group	2 (Terminal Block Accessories)
PU (SPU)	500 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332277556
Customs tariff number	85369010000

Product Classification	
UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads


Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-210	↓

Documentation

Bid Text			
216-210	19.02.2019	xml 2.80 KB	↓
216-210	11.09.2017	doc 24.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com