


Data Sheet | Item Number: 216-208

Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

<https://www.wago.com/216-208>



Color: ■ yellow

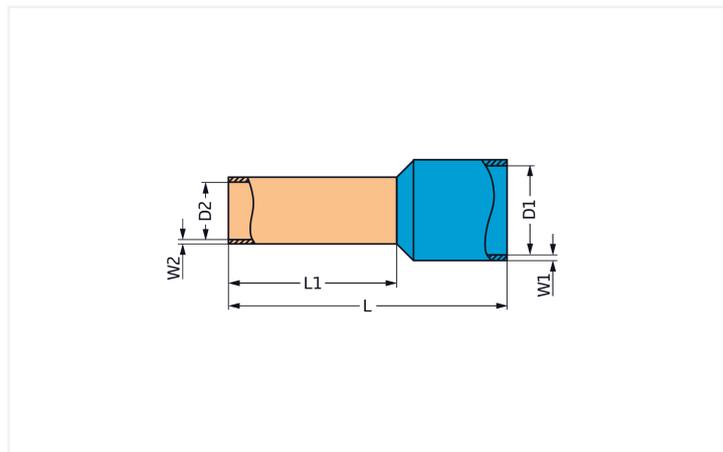

Dimensions in mm

Connection data

Metric cross-section of the ferrule	6 mm ²
Strip length	14 ... 15 mm / 0.55 ... 0.59 inches
Cross-section (AWG) of ferrule	10 AWG

Physical data

Total length	20 mm
Wall thickness of crimp sleeve	0.2 mm
Wall thickness (plastic collar)	0.3 mm
Crimp length (length of sleeve)	12 mm
Inner diameter of plastic collar	6.3 mm
Diameter crimp sleeve inside	3.5 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2006 Series

Material data

Color	yellow
Fire load	0.004 MJ
Weight	0.4 g



Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332277532
Customs tariff number	85369010000

Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 8.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-208	↓


Documentation

Bid Text			
216-208	19.02.2019	xml 2.80 KB	↓
216-208	11.09.2017	doc 24.50 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 216-208	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable