


Data Sheet | Item Number: 216-286

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

<https://www.wago.com/216-286>

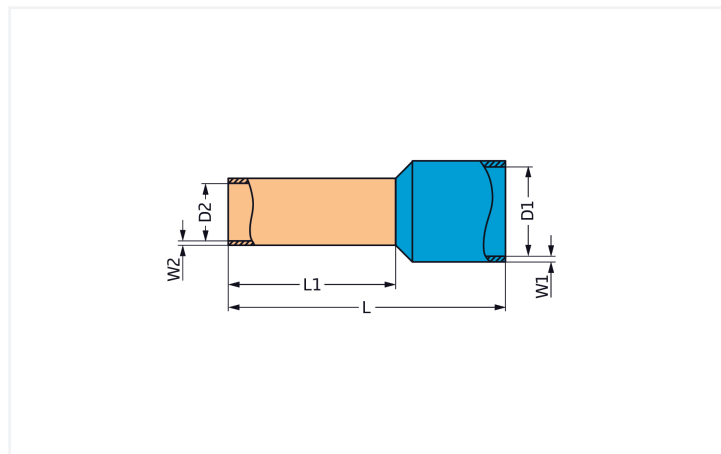

Color: ■ blue

Similar to illustration

Dimensions in mm

Connection Data

Metric cross-section of the ferrule	2.5 mm ²
Strip length	20 ... 21 mm / 0.79 ... 0.83 inches
Cross-section (AWG) of ferrule	14 AWG

Physical data

Total length	25 mm
Wall thickness of crimp sleeve	0.15 mm
Wall thickness (plastic collar)	0.25 mm
Crimp length (length of sleeve)	18 mm
Inner diameter of plastic collar	4.2 mm
Diameter crimp sleeve inside	2.2 mm

Mechanical data

Plastic collar	Standard collar
Suitable	2010 to 2016 Series

Material data

Color	blue
Fire load	0 MJ
Weight	0 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143654753
Customs tariff number	85369010000

Product Classification

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search


Environmental Product Compliance 216-286	↓
------------------------------------------	-------------------

Documentation

Bid Text

216-286	19.02.2019	xml 2.80 KB	↓
216-286	11.09.2017	doc 24.00 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com