


**Data Sheet | Item Number: 267-314**  
Conductor support; without ground contact; with snap-in mounting feet; 4-pole;  
2,50 mm²; white  
<https://www.wago.com/267-314>



Color:   white

Similar to illustration

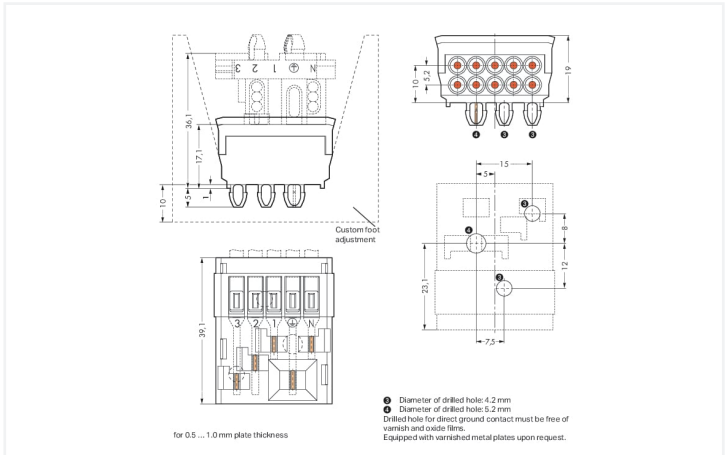

Dimensions in mm  
3) Drilled hole diameter: 4.2 mm  
4) Drilled hole diameter: 5.2 mm  
Drilled hole for direct PE contact must be free of varnish and oxide films.  
Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Our conductor support (item number 267-314) is designed for seamless electrical installations. Strip lengths must be between 11 mm and 12 mm when connecting conductors to conductor support. The white housing is made of polyamide (PA66) for insulation, the clamping spring is made of chrome-nickel spring steel (CrNi), and the contacts are made of electrolytic copper (ECu). Tin is used for coating the contact surfaces.

**Electrical data**

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

**Connection data**

Number of connection types	1
----------------------------	---

Connection 1	
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
Pole number	4

**Physical data**

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches



Material data		
Note (material data)		<a href="#">Information on material specifications can be found here</a>
Color	white	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E <sub>Cu</sub> )	
Contact Plating	Tin	
Fire load	0.111 MJ	
Weight	16.9 g	

Environmental requirements		
Processing temperature	-35 ... +85 °C	
Continuous operating temperature	-60 ... +105 °C	
Temperature stability	105 °C	

Commercial data		
Product Group	8 (Misc. Chassis Mount Blocks)	
eCl@ss 10.0	27-44-03-14	
eCl@ss 9.0	27-44-03-14	
ETIM 9.0	EC002560	
ETIM 8.0	EC000458	
PU (SPU)	50 pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4045454415457	
Customs tariff number	85366990990	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	


Approvals / Certificates


General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-314			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 267-314		ZUKEN Portal 267-314	
