




Color: white

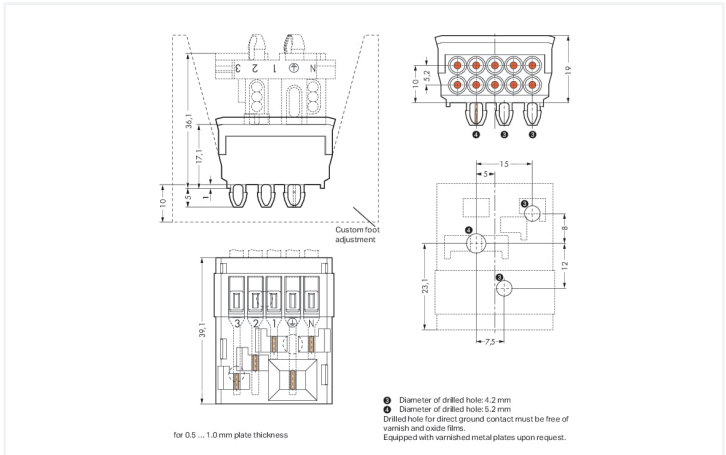

Dimensions in mm
3) Drilled hole diameter: 4.2 mm
4) Drilled hole diameter: 5.2 mm
Drilled hole for direct PE contact must be free of varnish and oxide films.
Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Our conductor support (item number 267-315) simplifies electrical installations. Ensure that the strip lengths are between 11 mm and 12 mm when connecting conductors to conductor support. The clamping spring is made of chrome-nickel spring steel (CrNi), the white housing is made of polyamide (PA66) for insulation, and the contacts are made of electrolytic copper (ECu). Tin is used for coating the contact surfaces.

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		-	500 V	-
Rated surge voltage		-	4 kV	-
Rated current		-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

Connection data	
Number of connection types	1

Connection 1	
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
Pole number	5

Physical data	
Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches



Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.111 MJ
Weight		19.2 g

Environmental requirements		
Processing temperature		-35 ... +85 °C
Continuous operating temperature		-60 ... +105 °C
Temperature stability		105 °C

Commercial data		
Product Group		8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0		27-44-03-14
eCl@ss 9.0		27-44-03-14
ETIM 9.0		EC002560
ETIM 8.0		EC000458
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4045454415464
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-315			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 267-315		ZUKEN Portal 267-315	