



Data Sheet | Item Number: 294-8235

Lighting connector; push-button, external; for Linect®; with snap-in ground contact; DA+ DA- L PE N; 5-pole; Cod. I; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-8235>

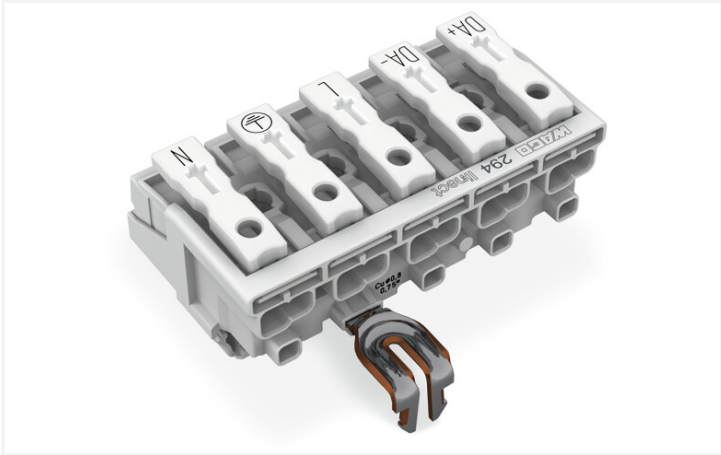

Color: white

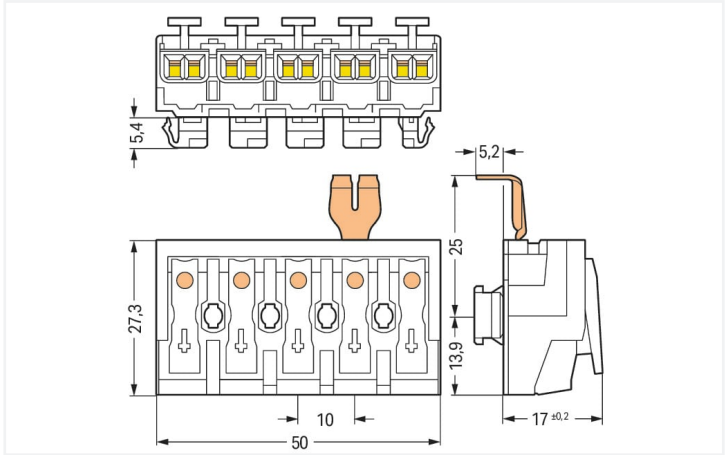

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connector end
- - Strain relief plate can be retrofitted

Electrical data

Ratings	Connection points		
Ratings per	IEC/EN 60998-1	IEC/EN 60998-1	IEC/EN 60998-1
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Connection points		
Ratings per	IEC/EN 60998-2-2	IEC/EN 60998-2-2	IEC/EN 60998-2-2
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Linect® plug-in connection		
Ratings per	IEC/EN 61984	IEC/EN 61984	IEC/EN 61984
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	16 A

Connection data

Total number of potentials	5
Number of connection types	4
PE function	Snap-in PE contact

Connection 1

Connection type 1	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	5

Connection 2

Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 14 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 16 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3

Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 ... 14 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4

Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Pin spacing	10 mm / 0.394 inches
Width	50 mm / 1.969 inches
Height	22.4 mm / 0.882 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches



Mechanical data	
Technology	Linect
Marking	DA+ DA- L N
Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.332 MJ
Weight	17.2 g
Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098874
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	a943fb5f-14ac-4d1b-999a-5ad6f90d323d
SCIP notification number (Belgium)	31d1e781-16ed-4b99-8a4b-b3c4b16dcde8
SCIP notification number (Bulgaria)	adb6151d-989c-40c2-977e-8cf5413a9e1e
SCIP notification number (Czech Republic)	5eade98d-9242-4e5a-b2c4-0eaa5e13f056
SCIP notification number (Denmark)	bf0add4a-a9bb-42ee-aa2c-aa7d845c5592
SCIP notification number (Finland)	8ffa09a6-221b-4709-a47c-d4c243797d7a
SCIP notification number (France)	decb130c-32d8-4c1d-aff3-bf9dc65ed50a

SCIP notification number (Germany)	3b8dd1cb-15e1-4cc1-8ea4-659bea689df7
SCIP notification number (Hungary)	e9b1ea3a-d344-47d5-9c4b-a0514c1eba53
SCIP notification number (Italy)	d2aa0324-b033-4ae8-ac97-70abb681a355
SCIP notification number (Netherlands)	f23cef73-3d29-4c5b-88e2-9763c921cc8d
SCIP notification number (Poland)	2086da8f-a21c-4cc4-a46d-3ea7329fa2bd
SCIP notification number (Romania)	3fad601-7a0e-4219-9af9-cb462a958fa3
SCIP notification number (Sweden)	d9a5e010-c142-4e79-8344-df65731c871b

General approvals	Declarations of conformity and manufacturer's declarations
-------------------	--



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Environmental Product Compliance

Environmental Product
Compliance 294-8235

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	

CAD data	CAE data
2D/3D Models 294-8235	WSCAD Universe 294-8235
	ZUKEN Portal 294-8235