


Kabelbinders, gemaakt van PA66, halogeenvrij. Verkrijgbaar in 13 maten, van 2,4 x 75 tot 9 x 914 mm. Om de serie compleet te maken, zijn ook bedradingsbinders voor zwaar gebruik, heropenbare kabelbinders, kabelbinders met rijgtag en kabelbinders met plaat verkrijgbaar.

Kleur	Kleurloos	Afmetingen LxH (mm)	7,6 x 380
Materiaal	Polyamide 66	Trekspanning (daN)	55
Klem gripcapaciteit Ø	8-96 mm	Gloeidraadtest	650 °C
Type	Standaard	Type materiaal	Halogeenvrij conform EN 60754-2
Electrocod	3640	Standaard	EN 62775
Damp corrosiviteit	< 5%	Vlambestendigheid in overeenstemming met UL 94	V2
Index zuurstoffimiet	27%	Installatie temperatuur	-5 +60 °C
Bereik bedrijfstemperatuur	-40 °C +80 °C (max. pieken 135 °C)		

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant	Resistant

#### DIMENSIONAL

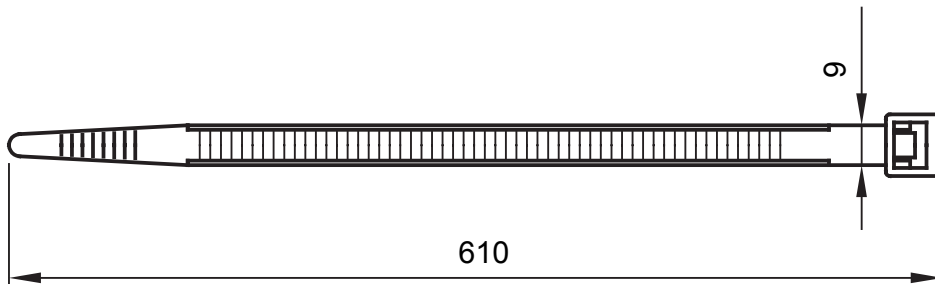

#### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**HF**  
HALOGEN FREE

Halogeenvrij conform  
EN 60754-2

INSTALLATION  
-5°C min  
+80°C max

-5 +60 °C

#### STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 10/03/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice