

Data Sheet | Item Number: 713-1437/117-000


THR male header, 2-row; 0.8 x 0.8 mm solder pin; angled; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 34-pole; black

<https://www.wago.com/713-1437/117-000>



Color: ■ black

Similar to illustration

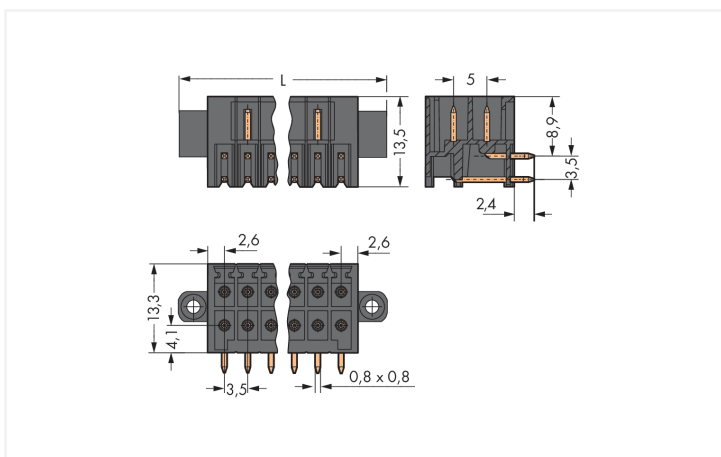

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$



Male connector, 713 Series, with 3.5 mm pin spacing

Enjoy convenient electrical installations with this male connector (item number 713-1437/117-000). The item's dimensions are (69.6 x 15.7 x 13.5) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THR soldering.

Notes

Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants:

Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	34	Connection 1	
Number of connection types	1	Pole number	34
Number of levels	2		

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	69.6 mm / 2.74 inches
Height	15.7 mm / 0.618 inches
Height from the surface	13.3 mm / 0.524 inches
Depth	13.5 mm / 0.531 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 ^(+0.1) mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	0°
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.183 MJ
Weight	10.5 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	PL
GTIN	4050821156697
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	23463d5a-4a46-457d-bf9c-a72d4915d7c6
SCIP notification number (Belgium)	eed3f3f8-c40c-47d1-8598-13f0a2a4728b
SCIP notification number (Bulgaria)	d1669aa8-5d11-4129-87fd-32fcd2102fc5
SCIP notification number (Czech Republic)	3f126e2a-0e07-4844-a486-1716bd3520ab
SCIP notification number (Denmark)	40c8df39-0ed9-48da-bd3f-727eb3d760dd
SCIP notification number (Finland)	5ea7fd67-5980-4c0e-becd-0cfaf8bfa078
SCIP notification number (France)	cb296ed8-7c2f-4fdc-b4ba-eec1b9cdb08e
SCIP notification number (Germany)	b299f189-ce69-4b84-b2be-f026c8e113c5
SCIP notification number (Hungary)	54c1f706-3333-4bc7-9b86-e2f4040ac7cf
SCIP notification number (Italy)	d58b4cfd-89af-4122-ac65-c9f7e3bcd13d
SCIP notification number (Netherlands)	b748e1b3-853f-4e1f-b072-777c470b1413
SCIP notification number (Poland)	24cb3d1b-a821-4f11-96d0-9f7ff3c868e6
SCIP notification number (Romania)	b7e1a6a4-1231-41c5-a6b6-9b284e48c341
SCIP notification number (Sweden)	dcfa2dfe-c5ac-4a56-b6fa-6c6cdd5652a0

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 713-1437/117-000	↓
--	---

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
		pdf 535.32 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
713-1437/117-000



CAE data

ZUKEN Portal
713-1437/117-000



PCB Design

Symbol and Footprint
via SamacSys
713-1437/117-000



Symbol and Footprint
via Ultra Librarian
713-1437/117-000



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [713-1117/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 34-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: [714-101](#)

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.