


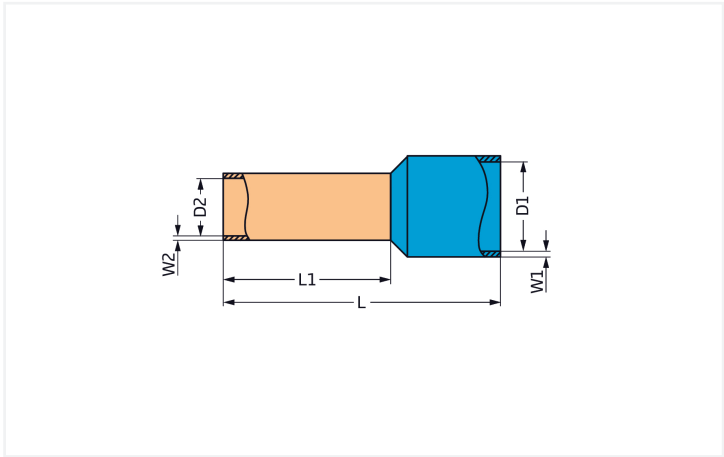

Color: ■ orange

Similar to illustration

Dimensions in mm

Connection Data	
Metric cross-section of the ferrule	0.5 mm²
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Cross-section (AWG) of ferrule	20 AWG

Physical data	
Total length	14 mm
Wall thickness of crimp sleeve	0.15 mm
Wall thickness (plastic collar)	0.25 mm
Crimp length (length of sleeve)	8 mm
Inner diameter of plastic collar	2.6 mm
Diameter crimp sleeve inside	1 mm

Mechanical data	
Plastic collar	Standard collar

Material data	
Color	orange
Fire load	0 MJ
Weight	0.1 g



Commercial data		
PU (SPU)		5000 pcs
Packaging type		Foil
GTIN		4055143968461

Product Classification		
UNSPSC		39121405
ETIM 9.0		EC000005
ETIM 10.0		EC000005
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads


Environmental Product Compliance

Compliance Search

Environmental Product Compliance
216-304/001-000

↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable