



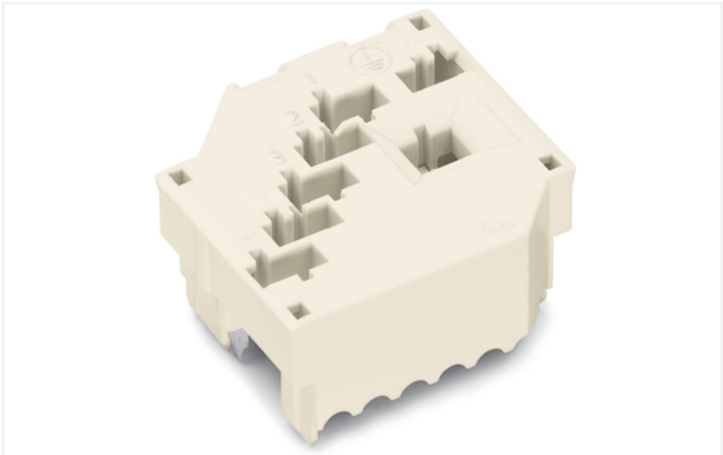

Color: white

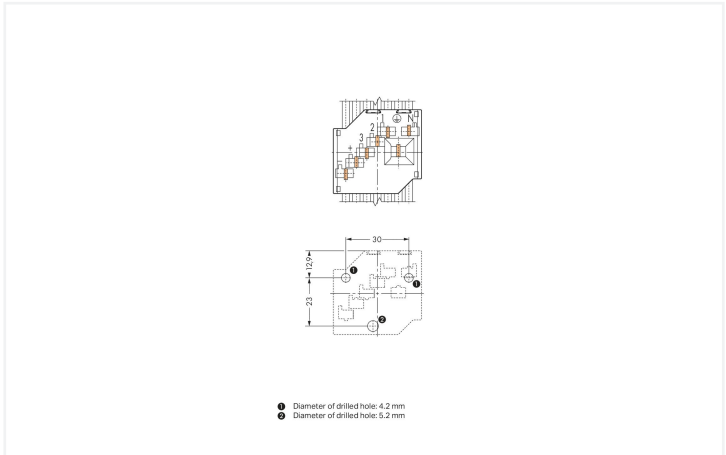

Dimensions in mm
1) Diameter of drilled hole: 4.2 mm
2) Diameter of drilled hole: 5.2 mm

Conductor support, 267 Series, white

Our conductor support (item number 267-437) ensures effortless electrical installations. The white housing is made of polyamide (PA66) for insulation, the clamping spring is made of chrome-nickel spring steel (CrNi), and the contacts are made of electrolytic copper (ECu). Tin is used for coating the contact surfaces.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	-
Rated surge voltage	-	-	-
Rated current	-	-	-

Connection data

Total number of potentials	7	Connection 1	
Number of connection types	1	Pole number	7

Material data

Note (material data)		Information on material specifications can be found here
Color	white	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (ECu)	
Contact Plating	Tin	
Fire load	0.258 MJ	
Weight	11.3 g	



Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 8.0	EC000458
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918997836
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 267-437	



Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 267-437	

CAE data	
ZUKEN Portal 267-437	