


## Walraven RapidStrut® Slide Nut G2 (BUP1000)

(H2404)

for quick connection of clamps and threaded rods

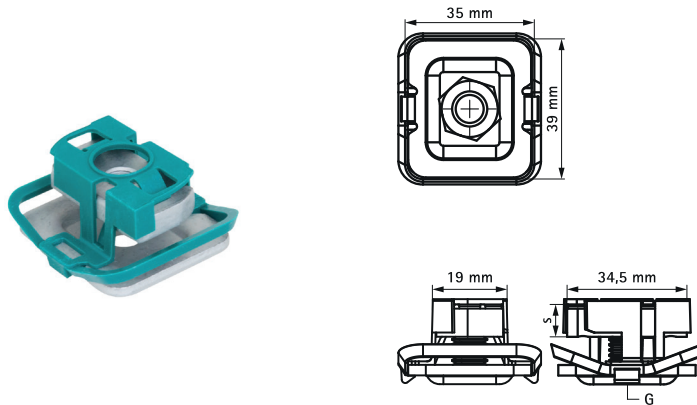

### Features & benefits

- slide nut with washer and Walraven RapidStrut® spring
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm, more details can be found on the Technical Datasheet.
- M10 and M12 are tested for fire safety according to EN 1366-1.

Product Number	For Rail Type	Thread Size	Material Thickness	Torque Moment For Installation	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	MT	T <sub>inst.</sub>	F <sub>a,x</sub>	F <sub>a,z</sub>	W x H x DtT
Unit description			mm	Nm	N	N	mm x mm x mm
665185106	41x21, 41x41, 41x51, 41x62, 41x82	M6	5.00	7	950	2,660	43.22 x 24.29 x 40.8
665185108	41x21, 41x41, 41x51, 41x62, 41x82	M8	6.00	11	1,100	3,120	43.22 x 24.29 x 40.8
665185110	41x21, 41x41, 41x51, 41x62, 41x82	M10	8.00	15	1,250	5,000	43.22 x 24.29 x 40.8
665185112	41x21, 41x41, 41x51, 41x62, 41x82	M12	9.00	22	2,440	5,000	43.22 x 24.29 x 40.8