


## Start Waterproof LED G3 MW

START Waterproof Single 1200 IP65 MW 2800lm 865 QC  
0067981

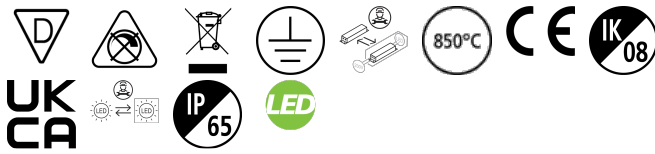

### PRODUCT OVERVIEW


Product name	START Waterproof Single 1200 IP65 MW 2800lm 865 QC
Technology	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
Warranty	5 years
Fixture luminous flux (lm)	2750
Luminaire efficacy (lm/W)	110
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	25
Electrical protection	Class I
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288679815

### PHOTOMETRY

Distance [m]	Core diameter [m]	E07	E10	E15	E20	E30	E40	E50	E60	E70	E80	E90	E100
0.5	1.40 1.25	2750	202	144	100	74	55	41	30	22	16	12	9
1.0	2.80 2.51	687	50	36	25	18	14	10	7	5	4	3	2
1.5	4.21 3.76	145	10	7	5	4	3	2	1.5	1.1	0.8	0.6	0.4
2.0	5.61 5.01	68	5	3.5	2.5	1.8	1.4	1	0.7	0.5	0.4	0.3	0.2
2.5	7.01 6.26	34	2.5	1.7	1.2	0.9	0.7	0.5	0.35	0.25	0.18	0.14	0.1
3.0	8.41 7.52	17	1.2	0.8	0.6	0.4	0.3	0.2	0.15	0.1	0.07	0.05	0.04

Distance [m]    Core diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle, 102.9°)  
— C90 - C270 (Half beam angle, 109.0°)

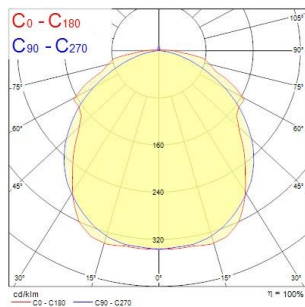

## Start Waterproof LED G3 MW

*START Waterproof Single 1200 IP65 MW 2800lm 865 QC*  
0067981

---

### TECHNICAL DRAWINGS

---

