



a1

a2

a3

m1

m2

m3

m4

m5


r1


r2


r3

	↕	D mm
3/4"	-	76
1"	-	77
1 1/4"	-	77
3/4"	✓	81
1"	✓	82
1 1/4"	✓	82


78-1001


 **98-5280A / 95-5280B**
3/4", 1", 1 1/4"




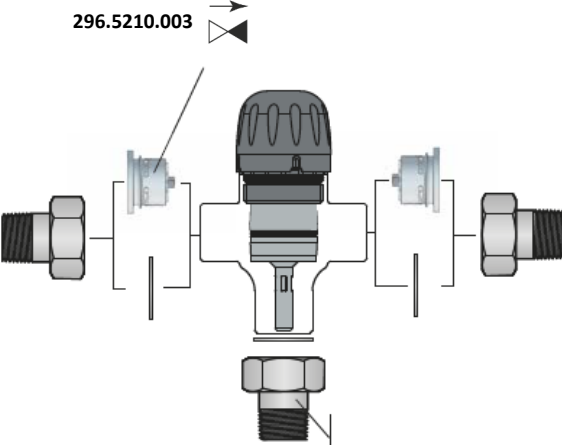


Artikelnummer	DN	Omschrijving
98-5281A	15	45-65 °C
98-5282A	20	45-65 °C
98-5283A	25	45-65 °C
98-5284A	15+20	20-50 °C / 35-70 °C
98-5285A	25	20-50 °C / 35-70 °C



 3/4" | DN 15

296.5210.003 





10-6630
3x 3/4" F > 1/2" M


10-6620
3x 3/4" F > 15mm knel

1015.630J9
3x 3/4" F > 16x2 pers

1015.630M9
3x 3/4" F > 20x2 pers

 1" | DN 20

296.5211.003 

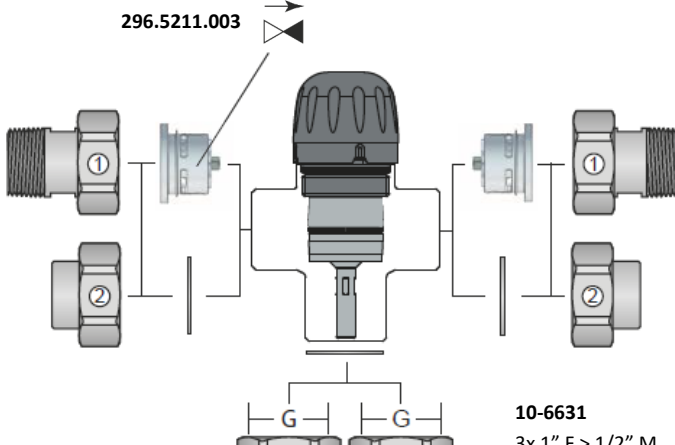

10-5330
3x 1" F > 15mm soldeer


10-5332
3x 1" F > 22mm soldeer


10-6631
3x 1" F > 1/2" M


10-6632
3x 1" F > 3/4" M

1015.640Q9.000
3x 1" F > 26x3 Pers

Labels: G, G, Cuø, R

 1 1/4" | DN 25

296.5212.003 

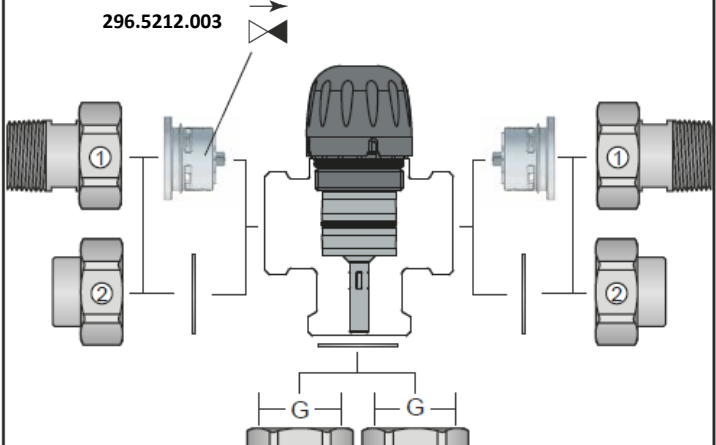

10-5334
3x 1 1/4" F > 28mm soldeer

10-6633
3x 1 1/4" F > 1" M

1015.650R9.000
3x 1 1/4" F > 32x3 Pers

Labels: G, G, Cuø, R